


TOP VIEW

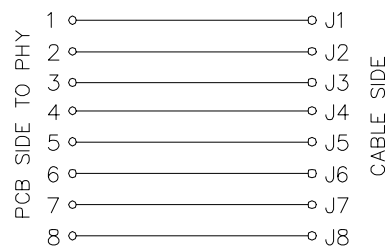


MATERIAL:
HOUSING: LCP,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$
SHIELD: C2680,T=0.20MM


MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.


All materials must meet Greenconn
requirement for environment protection.




FRONT VIEW



RIGHT SIDE VIEW



BOTTOM VIEW



RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

Ordering Information

C TZB115 - 08 XX B 001 C X S X

Standard Plating
02=Gold Flash

Color
1=Black


Standard Packing
B=Tray



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. $\pm 5.0^{\circ}$	X. ± 0.35
.X. $\pm 3.0^{\circ}$	.X. ± 0.30
.XX $\pm 2.0^{\circ}$	.XX ± 0.25
.XXX $\pm$	.XXX ± 0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZB115-CB001

PART NO.

CTZB115-08XXB001CXSX

TITLE.

RJ45 1*1 8P8C 无灯无弹