




TOP VIEW




LEFT SIDE VIEW




FRONT VIEW




RIGHT SIDE VIEW



BACK VIEW




BOTTOM VIEW

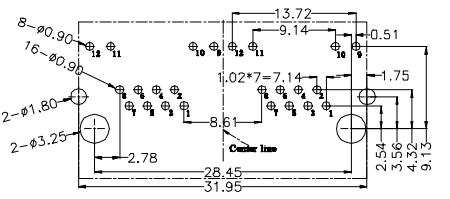

PCB LAYOUT(±0.05)

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK
TERMINAL: PHOSPHOR BRONZE
SHIELD: C2680
MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK
AND PLUG
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C.
ELECTRICAL:
VOLTAGE: 125 VOLTS AC
CURRENT RATING:1.5AMP
DIELECTRIC STRENGTH:1000 VAC RMS 50HZ
OR 60HZ,1 MIN
INSULATION RESISTANCE: 500 MEGA OHMS
MIN. INITIAL 500V DC FOR 1 MINUTE
CONTACT RESISTANCE: SINGLE TERMINAL 30
MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX.
AFTER DURABILITY TEST.
All materials must meet GREENCONN
hazardous substances control standards.

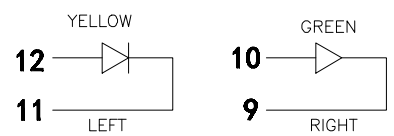

LED Specification

LED Color	Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V

Ordering Information

C TZB117 - 16 XX B 001 A X S X

Standard Plating
02=Gold Flash
Selective Plating
05=Gold Flash/Tin

Color
1=Black

Standard Packing
B=Tray
Selective Packing
N=PE Bag

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE.
X.'±3.0'	X.±0.35	CHECKED:	DATE:	CTZB117-CB1AS	RJ45 1*2 56带屏蔽带灯
.X'±2.0'	.X±0.30			PART NO.	
.XX'±1.5'	.XX±0.25			CTZB117-16XXB001AXSX	
.XXX'±1.0'	.XXX±0.10	APPROVED:	DATE:		

REV.	UNIT.	SCALE.	PAGE.	
A	mm	1:1	1/1	