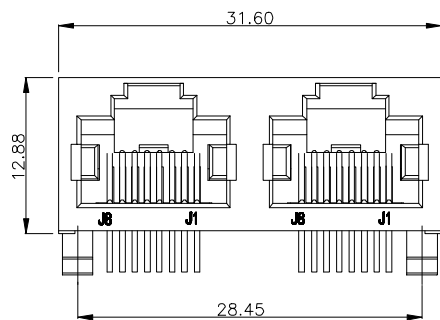



RECOMMENDED PCB LAYOUT

MATERIAL:
HOUSING: PA46 UL94V-0
TERMINAL: PHOSPHOR BRONZE

MECHANICAL:
DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

All materials must meet Greenconn requirement for environment protection.

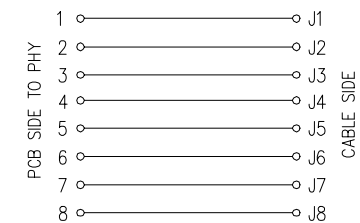


Ordering Information

C TZB121 - 16 XX B 001 F X S X
No. of Pins 16 Standard Plating 02=Gold Flash Color 1=Black Standard Packing B=Tray Selective Packing N=PE Bag



REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±/	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZB121-CB1FS

PART NO.

CTZB121-16XXB001FXSX

TITLE.

RJ45 直通 1*2 8P8C