




FRONT VIEW

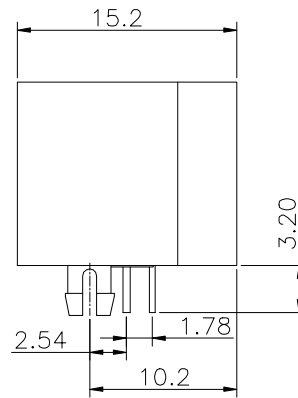


RIGHT SIDE VIEW



BOTTOM VIEW

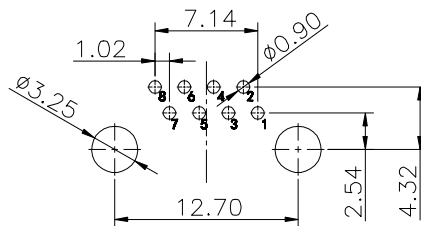

PCB LAYOUT (±0.05)

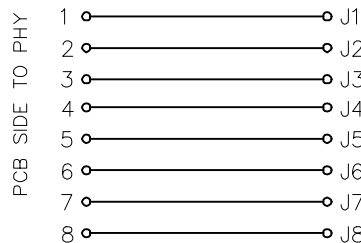

CABLE SIDE

MATERIAL:
 HOUSING: PA46,UL94V-0,BLACK
 TERMINAL: PHOSPHOR BRONZE
 MECHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE
 INSERTION FORCE: 2.2KG.F MAX
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG
 OPERATING TEMPERATURE: -40°C~+85°C
 STORAGE TEMPERATURE: -40°C~+85°C.
 ELECTRICAL:
 VOLTAGE: 125 VOLTS AC
 CURRENT RATING: 1.5AMP
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1 MIN
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL 500V DC FOR 1 MINUTE
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C TZB122 - 08

XX

B

003

Z

X

A

X

Standard Plating
02=Gold Flash

Color
1=Black

B=Tray



REV. 02 UNIT. mm SCALE. 1:1

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X. ±5.0'	X. ±0.30
.X' ±3.0'	.X ±0.25
.XX' ±2.0'	.XX ±0.15
.XXX' ±1.0'	.XXX ±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CTZB122-CB003
PART NO.
CTZB122-08XXB003ZXAX

TITLE.
RJ 45直通 56无灯全塑