




FRONT VIEW

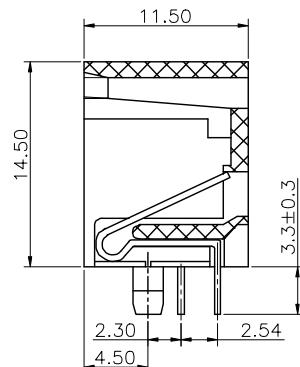


CUTAWAY VIEW



BACK VIEW




BOTTOM VIEW

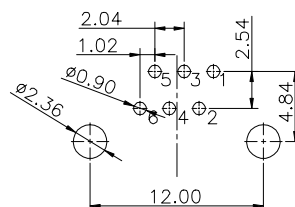

PCB LAYOUT(±0.05)

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK
TERMINAL: PHOSPHOR BRONZE
MECHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK
AND PLUG
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C.
ELECTRICAL:
VOLTAGE: 125 VOLTS AC
CURRENT RATING:1.5AMP
DIELECTRIC STRENGTH:1000 VAC RMS 50HZ
OR 60HZ,1 MIN
INSULATION RESISTANCE: 500 MEGA OHMS
MIN. INITIAL 500V DC FOR 1 MINUTE
CONTACT RESISTANCE: SINGLE TERMINAL 30
MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX.
AFTER DURABILITY TEST.
All materials must meet GREENCONN
hazardous substances control standards.

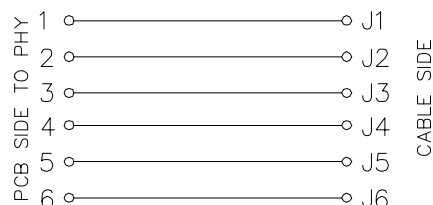

Ordering Information

C TZB125 - 06

XX

B

002

A

X

S

X

Standard Plating
02=Gold Flash

Color
6=Gray

Standard Packing
B=Tray
Selective Packing
N=PE Bag

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.'±3.0'	X.±0.35
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

CTZB125-CB2AS

TITLE.

TAB-UP 6P6C 1*1(L=11.5)

CHECKED:

DATE:

PART NO.

CTZB125-06XXB002AXSX

APPROVED:

DATE:

REV.
01

UNIT.
mm

SCALE.
1:1

PAGE.
1/1

