
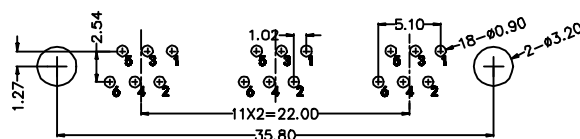


Diagram illustrating the connection between the PCB Side to PHY and the Cable Side for J1 through J6. The connections are as follows:

PCB SIDE TO PHY	CABLE SIDE
1	J1
2	J2
3	J3
4	J4
5	J5
6	J6

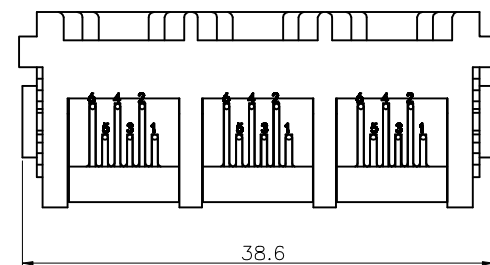

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

Ordering Information

C TZB135 - 18 XX A 001 A X S X

Standard Plating Color Standard Packing
02=Gold Flash 1=Black B=Tray
06=Gold 6u"

格稜股份有限公司
Greenconn Corporation

格菱股份有限公司 Greenconn Corporation					GENERAL TOLERANCE X. $\pm$ 3.0" X. $\pm$ 0.35 .X $\pm$ 2.0" .X $\pm$ 0.30 .XX $\pm$ 1.5" .XX $\pm$ 0.25 .XXX $\pm$ 1.0" .XXX $\pm$ 0.10		DESIGNED: CHECKED: APPROVED:		DATE: DATE: DATE:		DWG. NO. CTZB135-CA1AS PART NO. CTZB135-18XXA001AXSX		TITLE. RJ11 1*3 无灯全塑 带铁脚	
REV.	A	UNIT. mm	SCALE. 1:1	PAGE. 1/1										