



1 2 3 4 5 6 7 8 9

GREEN LEFT **YELLOW/GREEN RIGHT**



FRONT VIEW




RIGHT SIDE VIEW

MATERIAL:
 HOUSING: LCP,UL94V-0,BLACK.
 TERMINAL: PHOSPHOR BRONZE $\phi=0.46\text{MM}$
 SHIELD: C2680,T=0.20MM


MACHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING: 1.5AMP.
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.




All materials must meet GREENCONN hazardous substances control standards.



BOTTOM VIEW




RECOMMENDED PCB LAYOUT

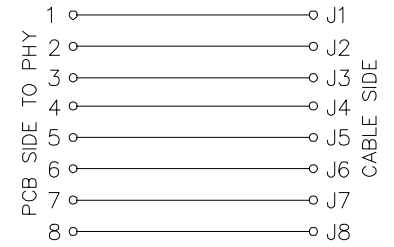

LED Specification

| Standard LED Color | LED Wavelength | Foward(A) | Foward(V) |
|--------------------|----------------|-----------|------------|
| Green | 569nm | 20mA | 1.85-2.45V |
| Yellow | 589nm | 20mA | 1.7-2.2V |

Ordering Information

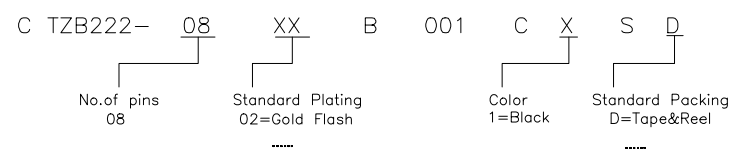

Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

3RD.ANG PROJ.
 PAGE. 1/1

| GENERAL TOLERANCE | |
|-------------------|----------|
| X. 5.0' | X.?.35 |
| .X 3.0' | .X?.30 |
| .XX 2.0' | .XX?.25 |
| .XXX 1.0' | .XXX?.15 |

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 CTZB222-CB1CS
 PART NO.
 CTZB222-08XXB001CX SX

TITLE.
 RJ45 直通 带屏蔽带灯

1 2 3 4 5 6 7 8 9