


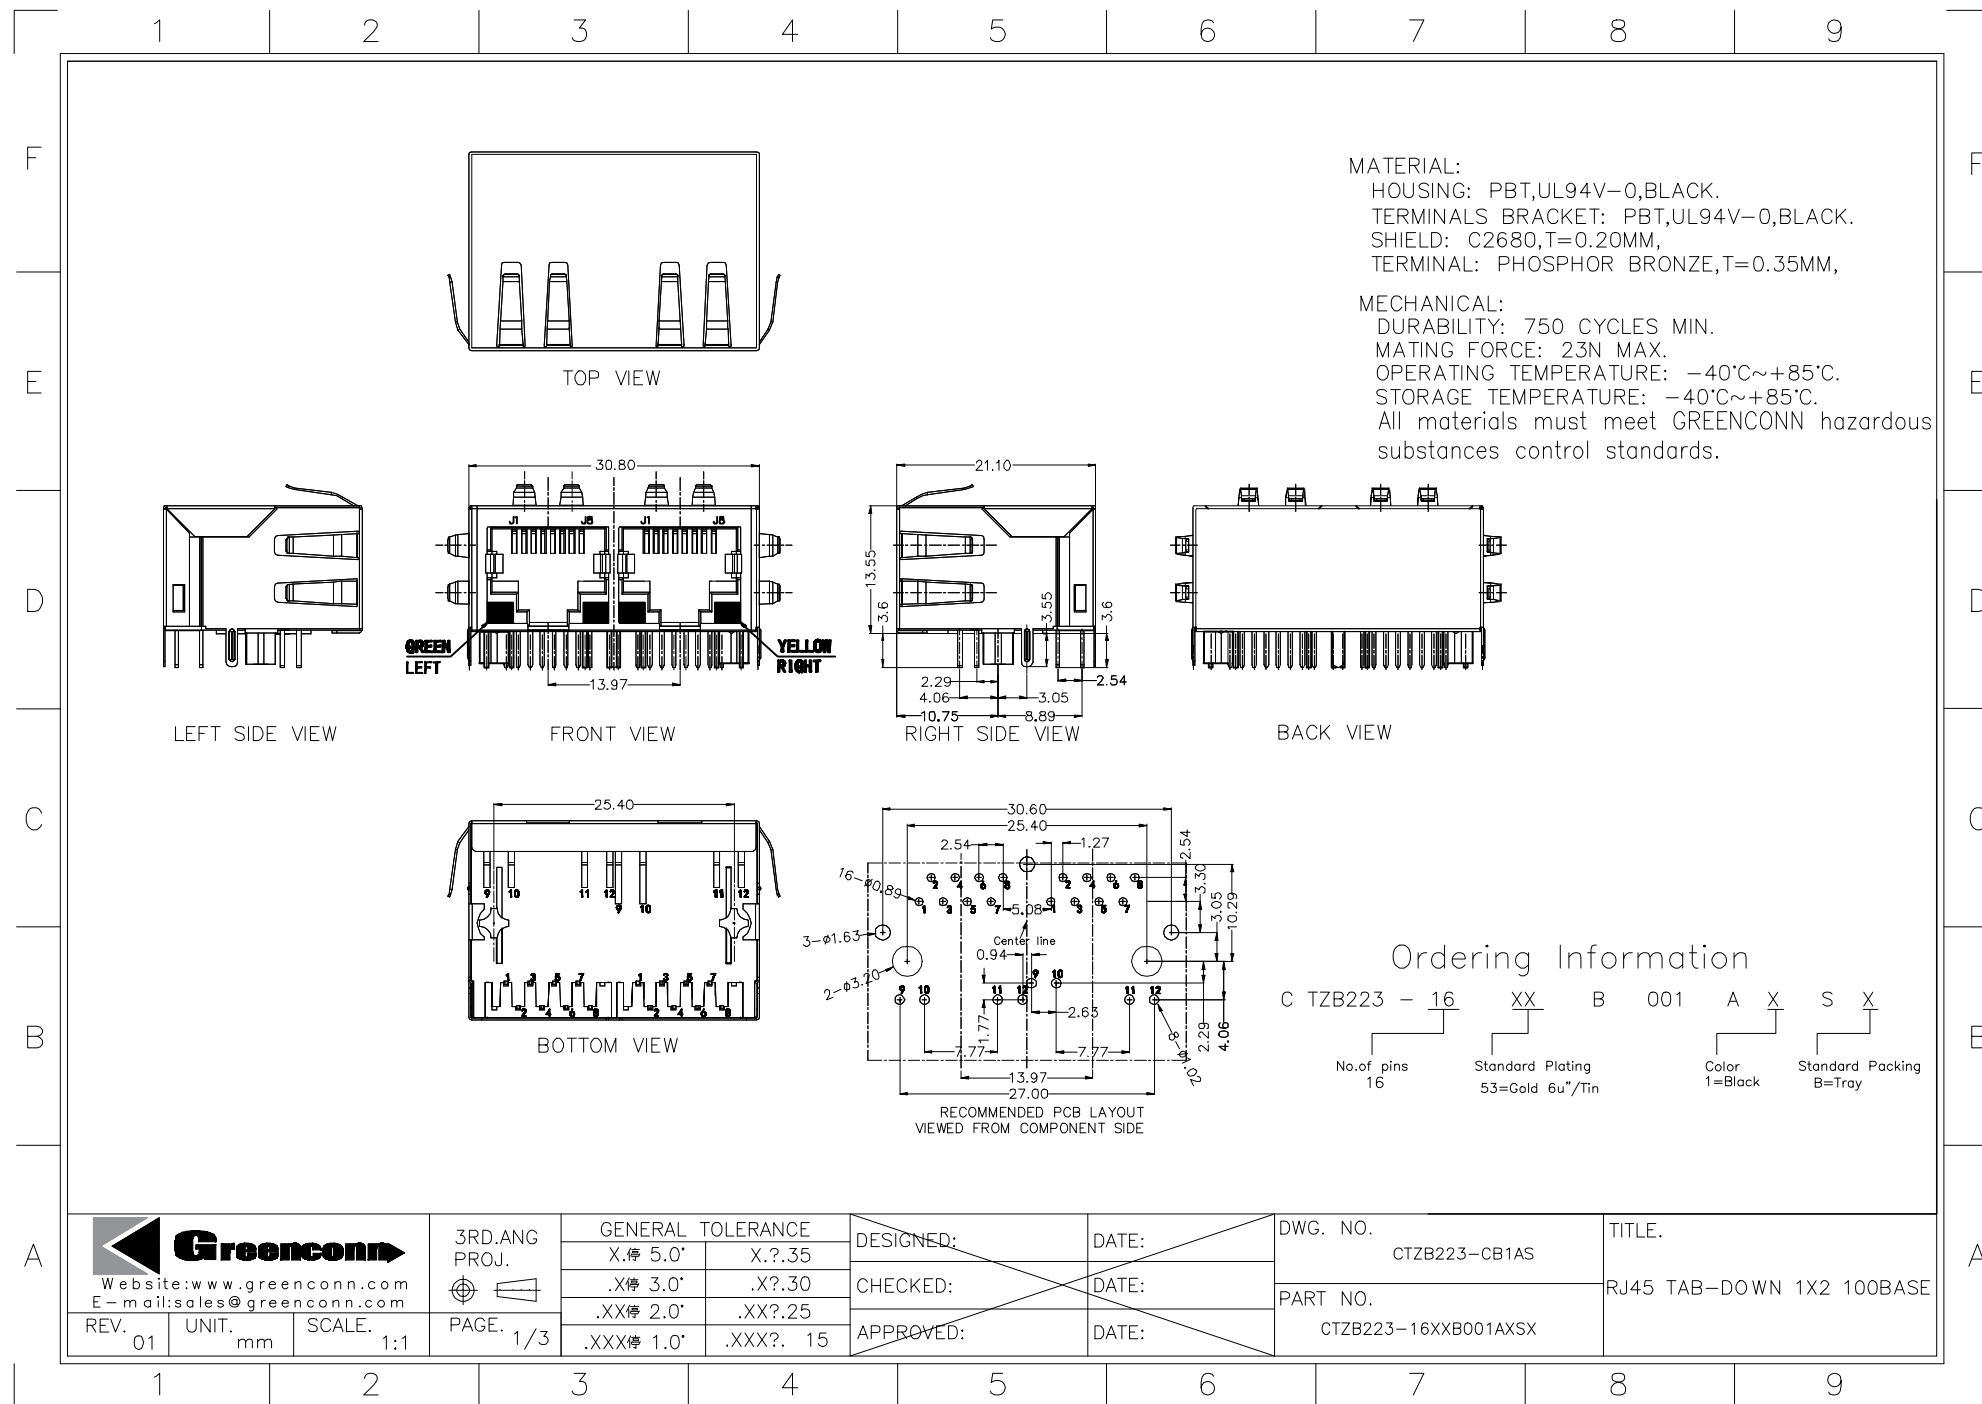

1 2 3 4 5 6 7 8 9

F


E

D

C


B

A

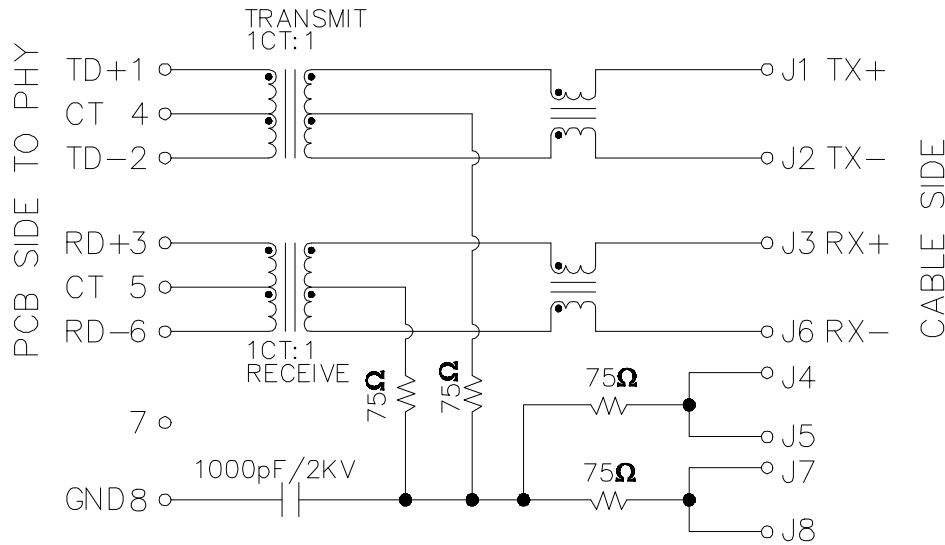

Electrical:

- 1.Turn ratio:1~2: J1~J2=1CT:1CT(±2%).
3~6: J3~J6=1CT:1CT(±2%).
- 2.OCL: 350uH Min.at 100KHz 100mV 8mA DC.
- 3.Insertion Loss: -1.0 dB Max 1~100MHz.
- 4.Return loss: -20dB Min 1~10MHz;
-16dB Min 10~30MHz.
-12dB Min 30~60MHz.
-10dB Min 60~80MHz.
- 5.Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- 6.CMR: -30dB Min 1~100MHz;
- 7.Hi-Pot:1500V AC & 2250V DC
6S 1mA PRI TO SEC

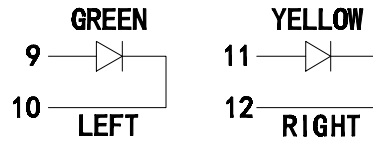

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85~2.45V
Yellow	585nm	20mA	1.7~2.2V



3RD.ANG
PROJ.

GENERAL TOLERANCE

X.停 5.0' X.?.35

.X停 3.0' .X?.30

.XX停 2.0' .XX?.25

.XXX停 1.0' .XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZB223-CB1AS

PART NO.

CTZB223-16XXB001AXSX

TITLE.

RJ45 TAB-DOWN 1X2 100BASE

REV. 01

UNIT. mm

SCALE. 1:1

PAGE. 2/3

1 2 3 4 5 6 7 8 9

