




FRONT VIEW



RIGHT SIDE VIEW

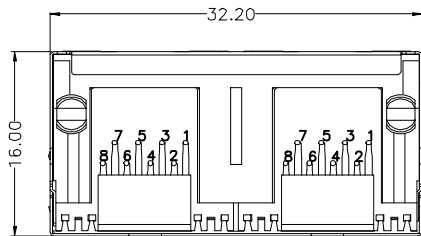

BOTTOM VIEW

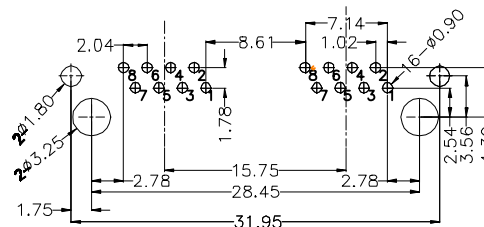

RECOMMENDED PCB LAYOUT

MATERIAL:

HOUSING: PA46 94V-0,BLACK.

TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$

SHIELD: C2680,T=0.20MM

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE: 2.2KG.F MAX.

RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.

CURRENT RATING: 1.5AMP.

DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.


INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

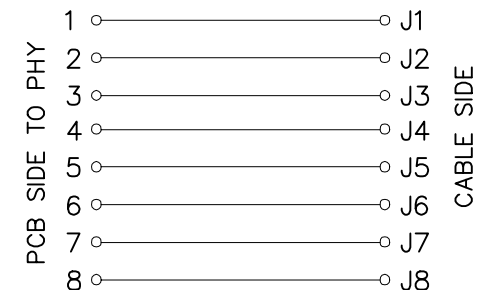

Ordering Information

C	TZB225	-	16	XX	B	005	F	X	A	X
No.of pins	16			Standard Plating			Color		Standard Packing	
				Q2=Gold Flash			1=Black		B=Tray	



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	3RD.ANG PROJ.	PAGE.
A	mm	1:1	1/3	

GENERAL TOLERANCE

X. 5.0' X.?.35

.X 3.0' .X?.30

.XX 2.0' .XX?.25

.XXX 1.0' .XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZB225-CB005

PART NO.

CTZB225-16XXB005FXAX

TITLE.

RJ45 直通 1*2 带屏蔽