



1 2 3 4 5 6 7 8 9


F




FRONT VIEW



RIGHT SIDE VIEW



BOTTOM VIEW




RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE

MATERIAL:  
HOUSING: PBT,UL94V-0,BLACK.  
TERMINAL: PHOSPHOR BRONZE T=0.35MM  
SHIELD: C2680,T=0.20MM,

MACHANICAL:  
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
INSERTION FORCE: 2.2KG.F MAX.  
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.  
OPERATING TEMPERATURE: -40°C~+85°C  
STORAGE TEMPERATURE: -40°C~+85°C.

ELECTRICAL:  
VOLTAGE: 125 VOLTS AC.  
CURRENT RATING: 1.5AMP.  
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
AFTER 500V DC FOR 1 MINUTE.  
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
INITIAL 50 MILLIOHMS MAX. AFTER  
DURABILITY TEST.

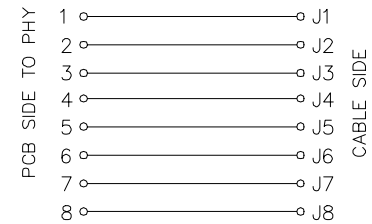

### Ordering Information

C TZB228 - 08 XX B 001 A X A X

Standard Plating  
53=Gold 6u"/Tin  
Selective Plating  
05=Gold Flash/Tin

Color  
1=Black

Standard Packing  
B=Tray  
.....

A

格稜股份有限公司  
**Greenconn Corporation**

REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
-----------	-------------	---------------	--------------	--

GENERAL TOLERANCE	
X: ±/	X.±0.35
.X' ±/	.X±0.30
.XX' ±/	.XX±0.25
.XXX' ±/	.XXX±0.15

DESIGN:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. CTZB228-CB001
PART NO. CTZB228-08XXB001AXAX

TITLE. RJ45 直通 56 带屏蔽无灯
----------------------------

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A