

TOP VIEW

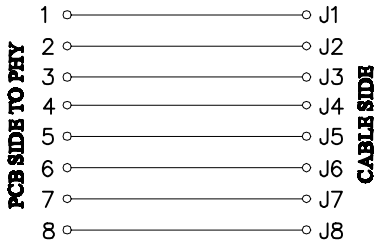

MATERIAL:
HOUSING: LCP,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM
SHIELD: C2680,T=0.20MM

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.



LEFT SIDE VIEW



FRONT VIEW



RIGHT SIDE VIEW



BOTTOM VIEW

脚位尺寸以过孔规为准

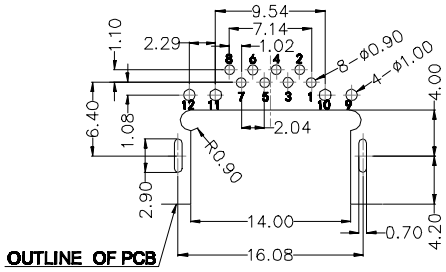

RECOMMENDED PCB LAYOUT

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V



Ordering Information

C TZB229 - 08 XX A 002 C X A X

- 08: No.of pins 08
- XX: Standard Plating 05=Gold Flash/Tin
- C: Color 1=Black
- X: Standard Packing B=Tray

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	3RD.ANG PROJ.	PAGE.
B	mm	1:1		1/1

GENERAL TOLERANCE	
X.停 5.0°	X.?.35
.X停 3.0°	.X?.30
.XX停 2.0°	.XX?.25
.XXX停 1.0°	.XXX?. 15

DESIGNED: DATE:
CHECKED: DATE:
APPROVED: DATE:

DWG. NO. CTZB229-CA002
PART NO. CTZB229-08XXA002CXAX

TITLE. RJ45沉板4.2 DIP带屏蔽带灯