




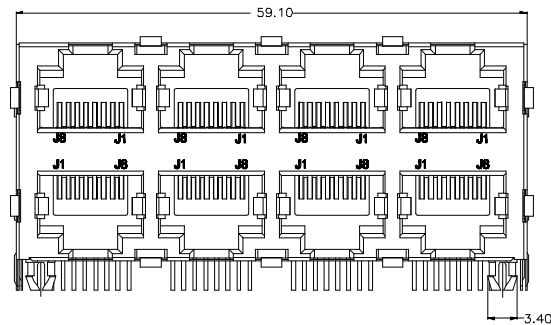


FRONT VIEW



RIGHT SIDE VIEW

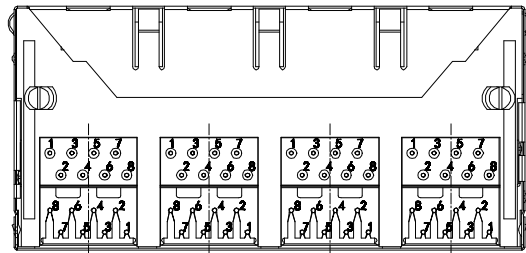

BOTTOM VIEW

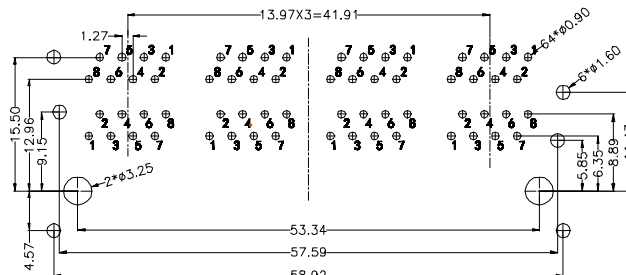


RECOMMENDED PCB LAYOUT

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$
SHIELD: C2680,T=0.20MM

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING:1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

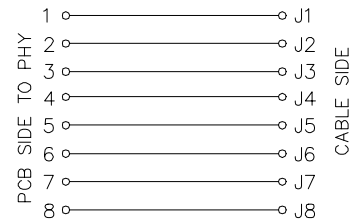

Ordering Information

C	TZB401	-	64	XX	B	001	A	X	S	X
	No.of pins		64	Standard Plating			Color		Standard Packing	
				02=Gold Flash			1=Black		B=Tray	
				Selective Plating						
				06=Gold 6u"/Gold Flash						
				09=Gold 3u"/Gold Flash						



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CTZB401-CB1AS
PART NO.
CTZB401-64XXB001AXSX

TITLE.
RJ45 2*4 無燈帶彈