
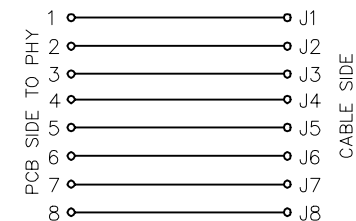
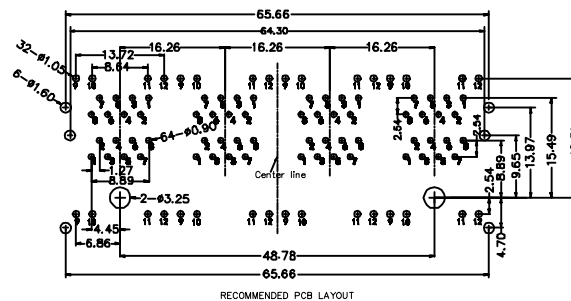



MACHANICAL:
DURABILITY: 750CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE : 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG .
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.

ELECTRICAL: 125VOLTS AC.
VOLTAGE: 125VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
INSULATION RESISTANCE: 500MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX.AFTER
DURABILITY TEST.

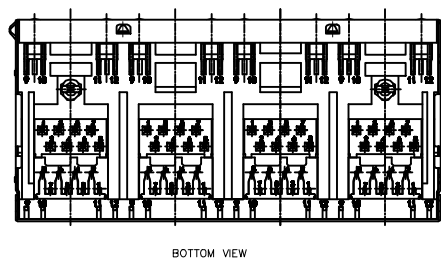

Ordering Information

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V



C TZB401 - 64 XX B 003 A X A X


No.of pins 64
Standard Plating
02=Gold Flash
Selective Plating
07=Gold 2u"
09=Gold 3u"

Color 1=Black
Standard Packing
B=Tray



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1
--------	----------	------------	-----------

3RD.ANG
PROJ.

PAGE. 1 / 1

GENERAL TOLERANCE	
$X.\pm 5.0'$	$X.\pm 0.35$
$.X'\pm 3.0'$	$.X\pm 0.30$
$.XX'\pm 2.0'$	$.XX\pm 0.25$
$XXX'\pm 1.0'$	$.XXX\pm 0.15$

DESIGNED:

CHECKED:

~~APPROVED:~~

DATE: _____

DATE: _____

DATE:

DWG. NO.

CTZB401-CB003

PART NO.	CTZB401-64XXB003AXAX
----------	----------------------

	TITLE.
--	--------

RJ45 2*4PORT 90度 DIP