


1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

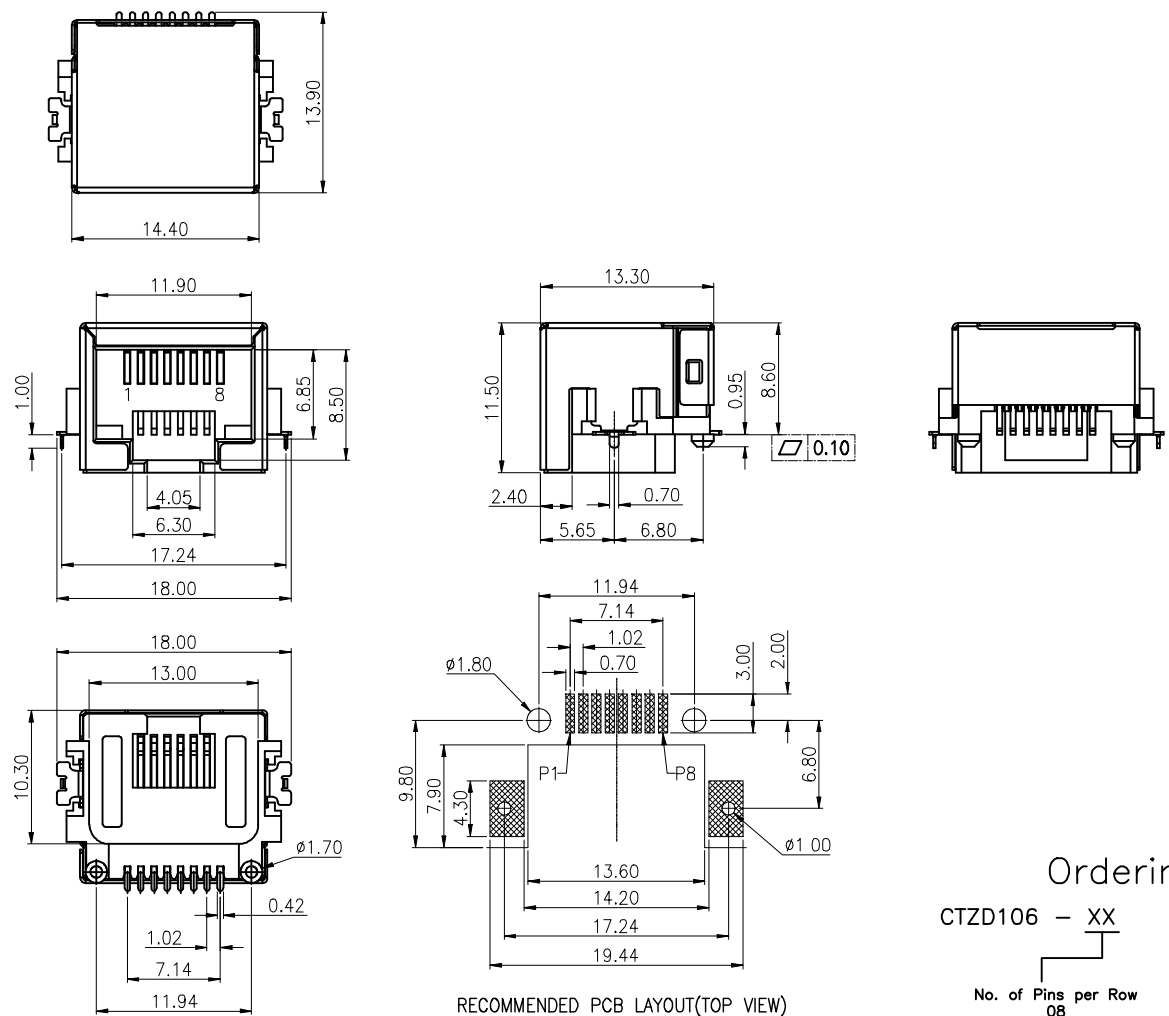

Specification:
 Current : 1.5A
 Withstanding Voltage : 500V AC
 Contact Resistance: 30 mΩ max.
 Insulation Resistance: 500 MΩ min.
 Temperature Range:-40°C to +85°C
Materials
 Contact Material:Phosphor Bronze T=0.30
 Shell: Brass T=0.20
 Insulation Material:UL 94V-0 LCP
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

CTZD106 - XX XX B 007 C X A X

No. of Pins per Row 08 Standard Plating 64=Gold 3U"/Tin 53=Gold 6U"/Tin Color 1=Black Standard Packing B=Tray D=T&R

RECOMMENDED PCB LAYOUT(TOP VIEW)
 TOLERANCE ± 0.05

 Website: www.greenconn.com E-mail: sales@greenconn.com			3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE X: $\pm 5.0'$ X: \pm .X' $\pm 3.0'$.X ± 0.30 .XX' $\pm 2.0'$.XX ± 0.25 .XXX' $\pm 1.0'$.XXX ± 0.10		DESIGNED:	DATE:	DWG. NO. CTZD106-B007CA	TITLE. RJ45 Shielded Receptacle Horizontal Single Port Tht
				CHECKED:	DATE:	PART NO. CTZD106-XXXX B007CXAX			
REV. 01	UNIT. mm	SCALE. 1:1							

1 2 3 4 5 6 7 8 9