




FRONT VIEW

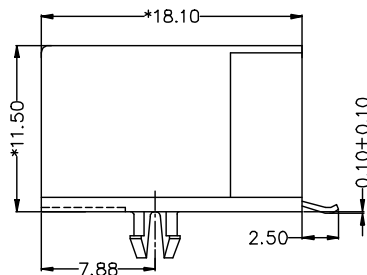

RIGHT SIDE VIEW



BOTTOM VIEW



PCB LAYOUT(±0.05)

MATERIAL:  
HOUSING: FR52,UL94V-0,BLACK  
TERMINAL: PHOSPHOR BRONZE  
MECHANICAL:  
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE  
INSERTION FORCE: 2.2KG.F MAX  
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK  
AND PLUG  
OPERATING TEMPERATURE: -40°C~+85°C  
STORAGE TEMPERATURE: -40°C~+85°C.  
ELECTRICAL:  
VOLTAGE: 125 VOLTS AC  
CURRENT RATING:1.5AMP  
DIELECTRIC STRENGTH:1000 VAC RMS 50HZ  
OR 60HZ,1 MIN  
INSULATION RESISTANCE: 500 MEGA OHMS  
MIN. INITIAL 500V DC FOR 1 MINUTE  
CONTACT RESISTANCE: SINGLE TERMINAL 30  
MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX.  
AFTER DURABILITY TEST.  
All materials must meet GREENCONN  
hazardous substances control standards.

## Ordering Information

C TZD111 - 06

XX

B

001

Z

X


S

X

Standard Plating  
02=Gold Flash  
Selective Plating  
06=Gold 6u"/Gold Flash

Color  
1=Black

Standard Packing  
B=Tray

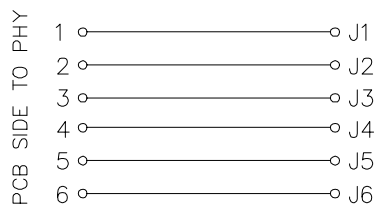

CABLE SIDE

格菱股份有限公司  
**Greenconn Corporation**

### GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X.'±3.0'   | X.±0.35   |
| .X'±2.0'   | .X±0.30   |
| .XX'±1.5'  | .XX±0.25  |
| .XXX'±1.0' | .XXX±0.10 |

DESIGNED:

DATE:

DWG. NO.

CTZD111-CB1ZS

TITLE.

RJ12 1\*1 6P6C 90°  
SMT

CHECKED:

DATE:

PART NO.

CTZD111-06XXB001ZXSX

APPROVED:

DATE:

REV.  
A

UNIT.  
mm

SCALE.  
1:1

PAGE.  
1/1



1

2

3

4

5

6

7

8

9