

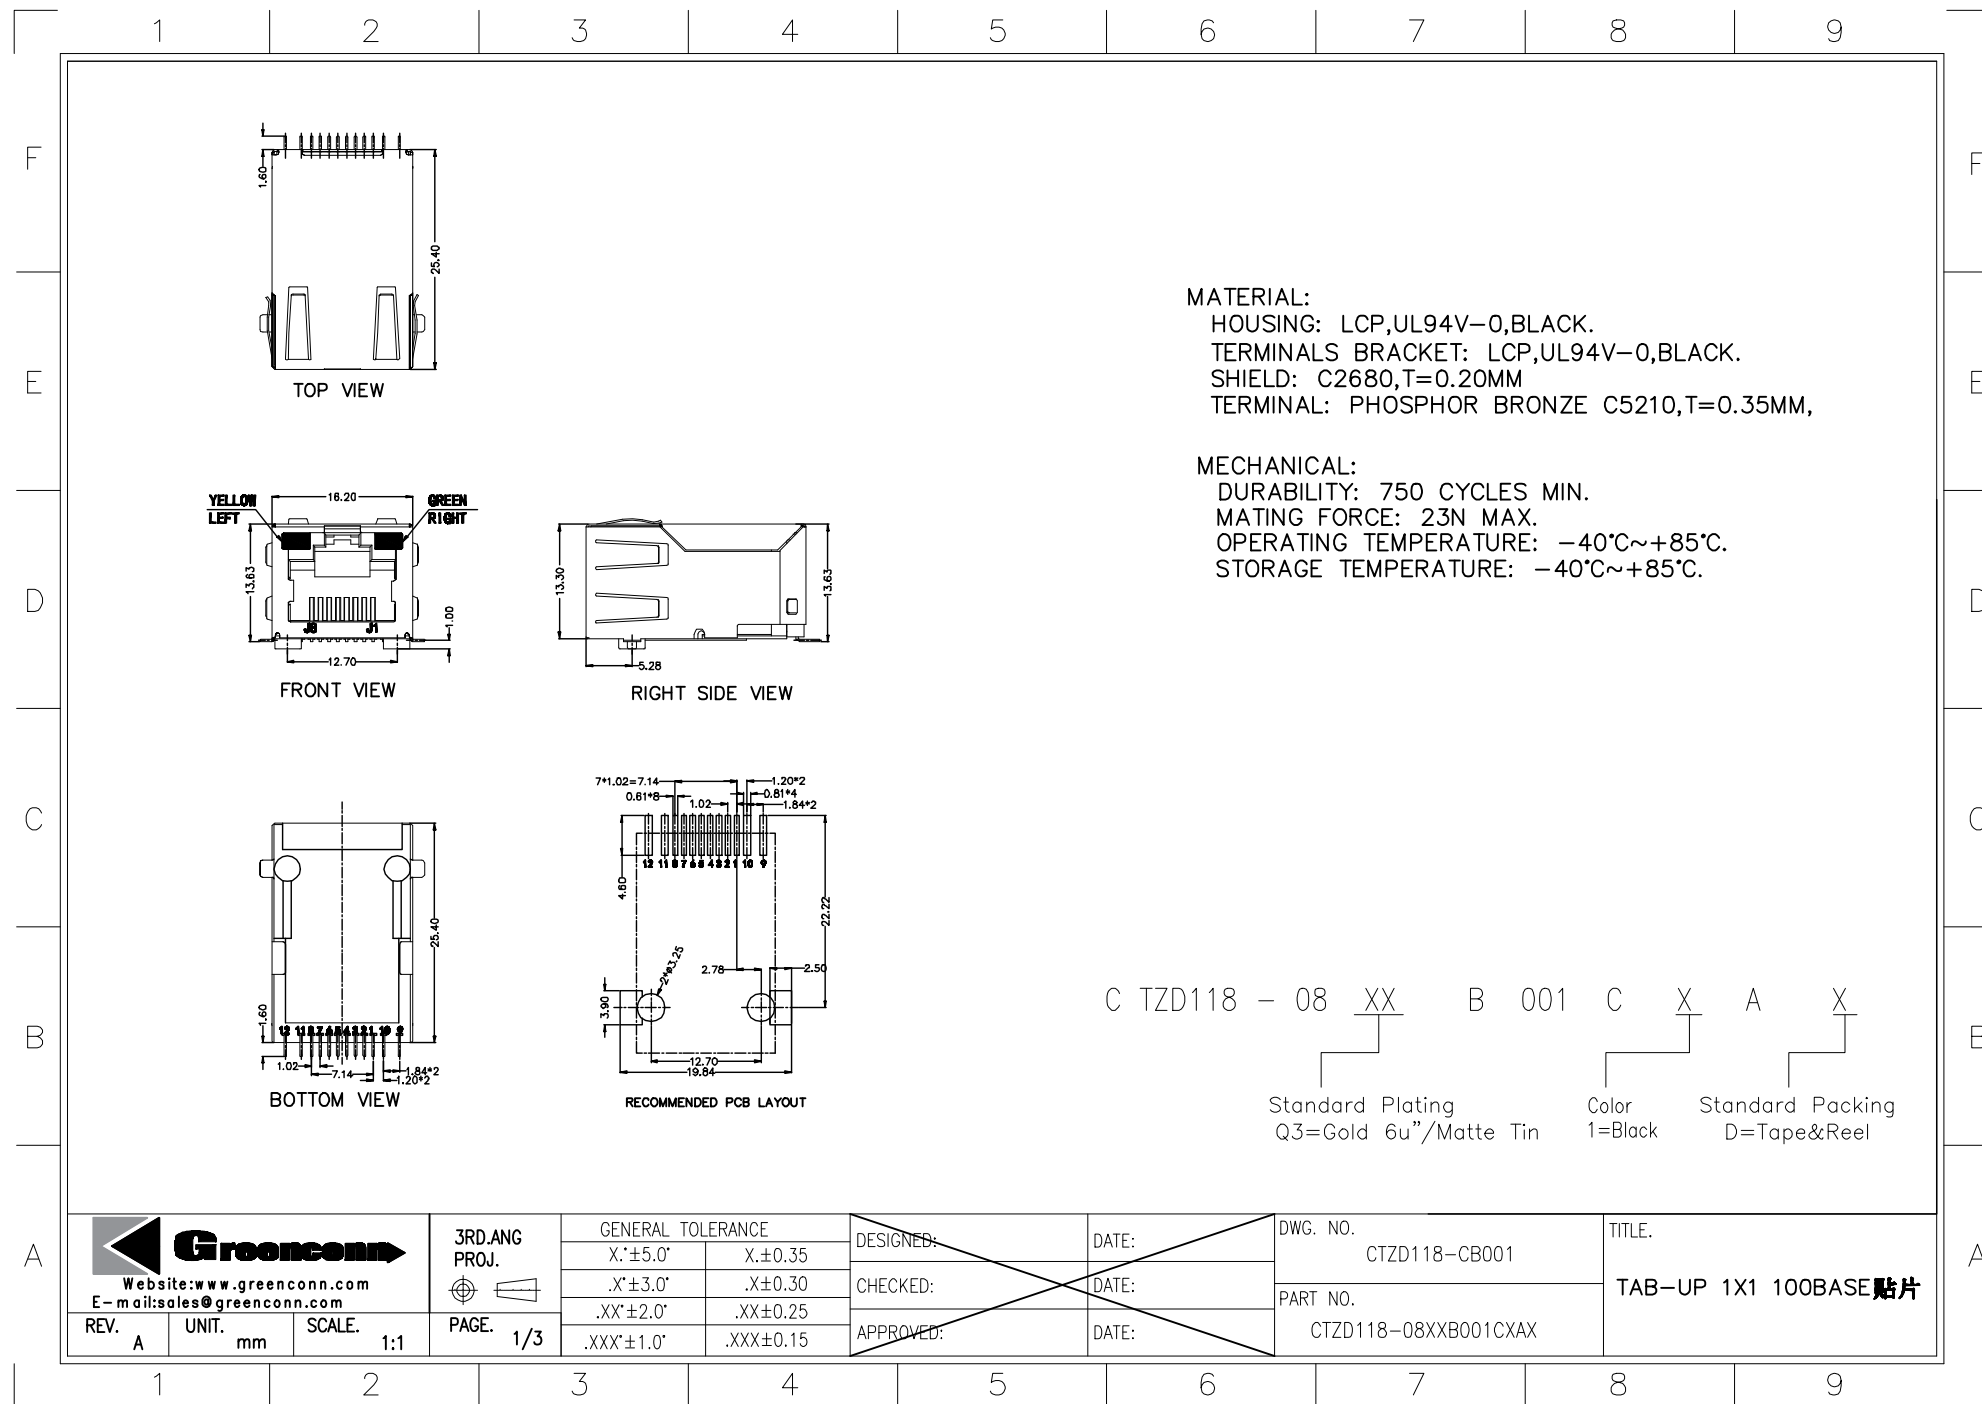


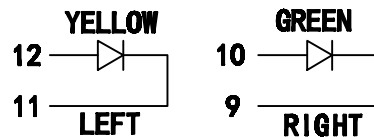

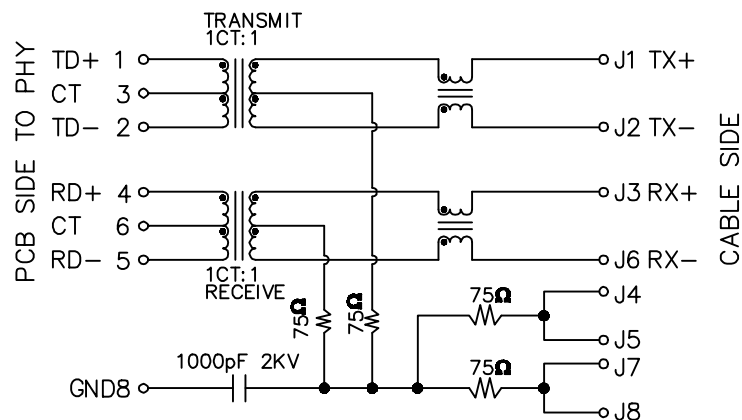

Electrical:

- Turn ratio: 1~2: J1~J2=1CT:1CT($\pm 2\%$).
4~5: J3~J6=1CT:1CT($\pm 2\%$).
- OCL: 350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -20dB Min 1~10MHz;
-16dB Min 10~30MHz.
-12dB Min 30~60MHz.
-10dB Min 60~80MHz.
- Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot: 1500V AC & 2250V DC
6S 1mA PRI TO SEC

LED Specification


Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85~2.45V
Yellow	585nm	20mA	1.7~2.2V



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 2/3

GENERAL TOLERANCE

X'±5.0"	X.±0.35
.X'±3.0"	.X±0.30
.XX'±2.0"	.XX±0.25
.XXX'±1.0"	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZD118-CB001


PART NO.

CTZD118-08XXB001CXAX

TITLE.

TAB-UP 1X1 100BASE 贴片

PROFILE OF WAVE SOLDER

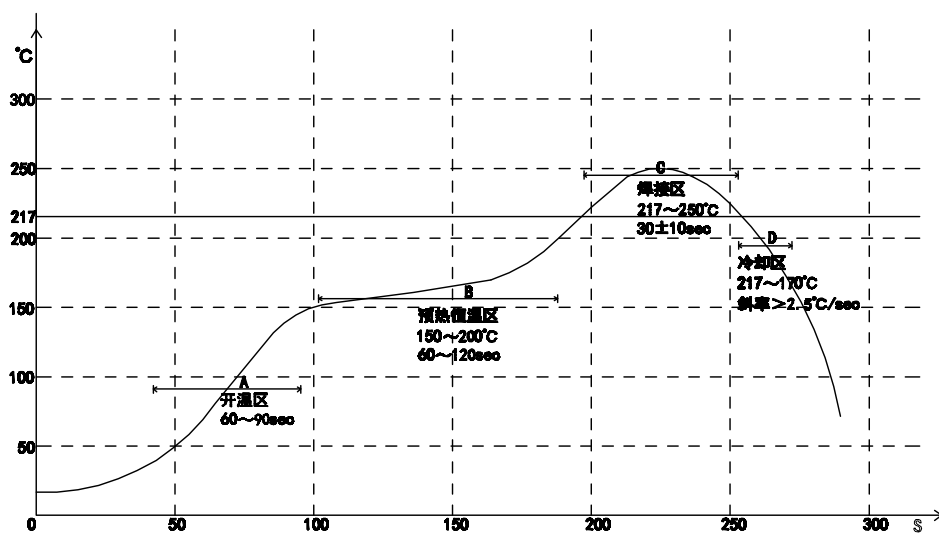

A. Temperature range of open
 B. Preheat temperature zone
 C. The welding zone
 D. The cooling zone
 Tip temperature: $265 \pm 5^{\circ}\text{C}$.
 Tip temperature time: 30 ± 10 Sec.
 Tip melting point of Sn96.5/Ag3/Cu0.5.



Website: www.greenconn.com
 E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD. ANG
 PROJ.

 PAGE. 3/3

GENERAL TOLERANCE

X' ± 5.0	X ± 0.35
.X' ± 3.0	.X ± 0.30
.XX' ± 2.0	.XX ± 0.25
.XXX' ± 1.0	.XXX ± 0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZD118-CB001

PART NO.

CTZD118-08XXB001CXAX

TITLE.

TAB-UP 1X1 100BASE 贴片