



1 2 3 4 5 6 7 8 9

F

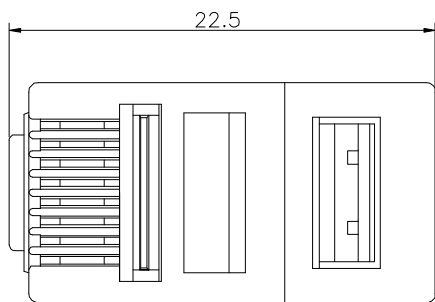


FRONT VIEW




Housing: PC,UL94V-2,Transparent.
 Terminal: Copper Alloy
 Voltage:125 Volts AC.
 Current rating:1.5AMP
 Dielectric strength:1000 VAC RMS 50Hz or 60Hz,1MIN.
 Insulation Resistance:1000 Mega ohms min@500V DcT
 Contact Resistance:50 Milliohms MAX
 Operating Temperature:-40°C~+80°C
 All materials must meet GREENCONN hazardous substances control standards.

E

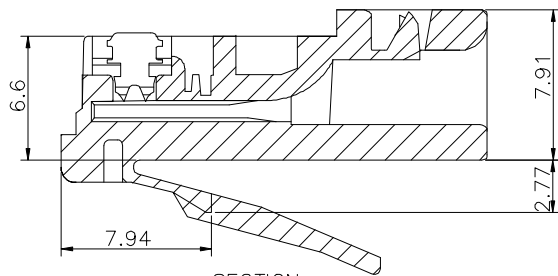


SECTION

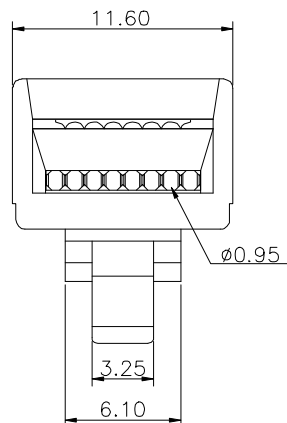


BACK VIEW

C



BINARY PIECE STRAND WIRE



ROUND WIRE

B

Ordering Information

G TZZ106 - 08 XX A 001 M X Z X

Standard Plating
48=Gold 3u"/Ni

Color
F=Transparent

Standard Packing
N=PE Bag

A

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.±3.0'	X.±0.35
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

GTZZ106-CA1MZ

TITLE.

RJ45 8P8C PLUG(水晶头)

CHECKED:

DATE:

PART NO.

GTZZ106-08XXA001MXZX

APPROVED:

DATE:

REV. 01

UNIT. mm

SCALE. 1:1

PAGE. 1/1



1 2 3 4 5 6 7 8 9