
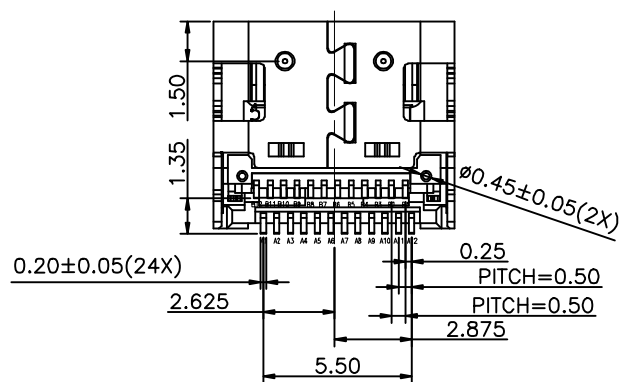
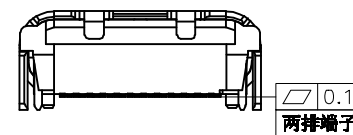
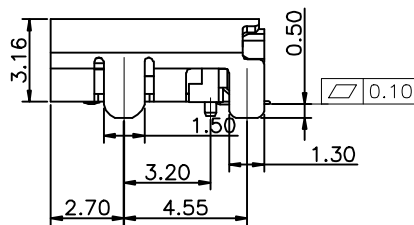


NOTE:
MATERIAL
HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0 BLACK.
CONTACTS: BRASS
SHIELDING PLATE: STAINLESS STEEL
FRONT SHELL: STAINLESS STEEL

SPECIFICATION
CURRENT RATING:3.0A
VOLTAGE RATING:5.0V.
INSULATION RESISTANCE: 100MΩ MIN
DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
OPERATING TEMPERATURE: -25℃~+85℃.
All materials must meet GREENCONN
hazardous substances control standards.

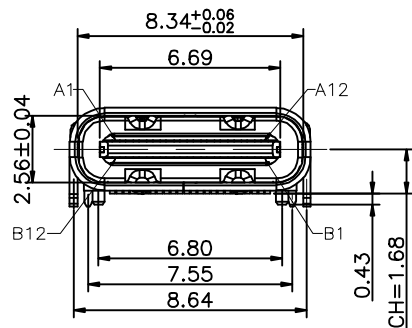

Ordering Information

C UAD101 - XX XX B 002 C X B X

No. of Pins per Row 24

Standard Plating
02=Gold Flash
B1=Gold 3u"

Color
1=Black

Standard Packing
D=T&R



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01

UNIT. mm

SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/2

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


CUAD101-CB002CB

PART NO.

CUAD101-XXXX B002CXBX

TITLE.


USB C F 双排板上SMT
(有柱有凸包) 一体式成型

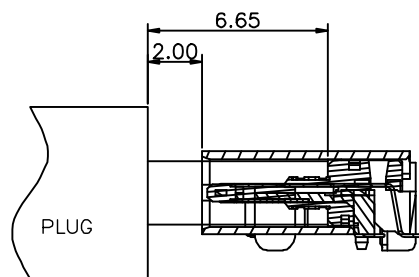

AFTER MATING

USB TYPE-C PIN ASSIGNMENTS

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

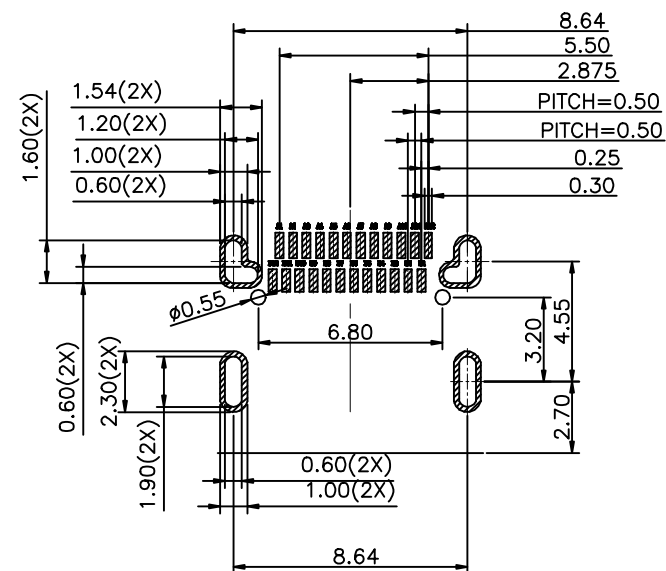

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.60MM;DEFAULT TOLERANCE:±0.05




Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01

UNIT. mm

SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 2/2

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUAD101-CB002CB

PART NO.

CUAD101-XXXX B002CXBX

TITLE.

USB C F 双排板上SMT
(有柱有凸包) 一体式成型