

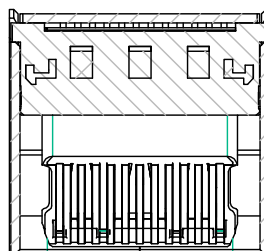
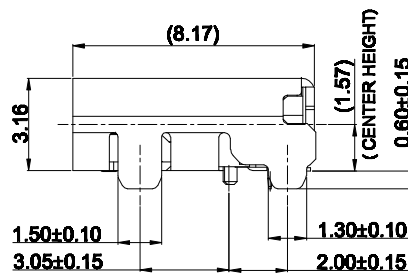
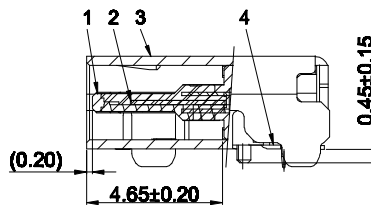
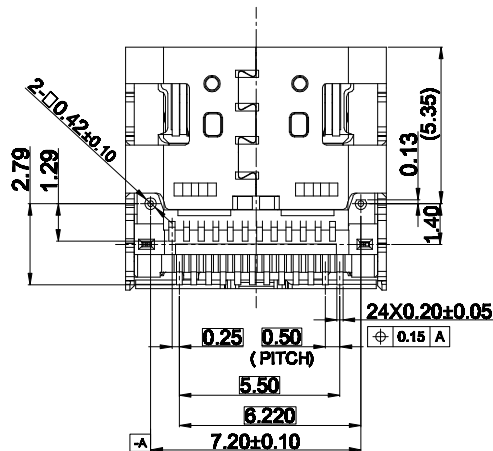


VACUUM AREA
(3.40)

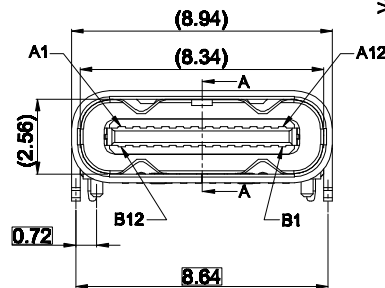

Specifications
Current Rating:5.0Amp
Voltage Rating:5V AC
Insulation Resistance:100MΩ Min.
Dielectric Withstanding Voltage:100VAC
Contact Resistance:40mΩ Max.
Mating force:5~20N
Unmating force:8~20N
Durability Cycle:10,000 cycle
Operating Temperature:-40°C to +85°C
Materials
Insulation Material:UL94V-0 PA9T
All materials must meet GREENCONN
hazardous substances control standards.

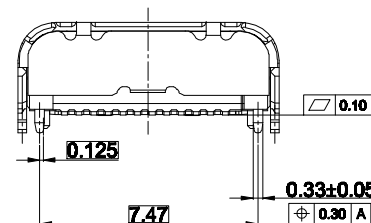

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBUS1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBUS2	D+	D-	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH	REMARK
4	TERMINAL	24	CHINA	MATING SIDE: Au 3μm or 25μm/400μm/10μm SOLDER TAIL: Sn PLATING, 50μm NICKEL OVERALL	T-4.12
5	SHELL	1	STAINLESS STEEL	NICKEL PLATING	T-4.13
2	MID PLATE	1	BRASS/PH	NICKEL PLATING	T-4.14
1	MAIN HOUSING	1	PA9T GF30	BLACK/UV40	BLACK/UV40

Ordering Information

C UAD212 - XX XX B 001 D X 9 X
No. of Pins 24 Standard Plating 09=Gold 3U" Color 1=Black Standard Packing D=Tape&Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

3RD.ANG
PROJ.
PAGE. 1/2

GENERAL TOLERANCE

X'±5.0'	X±0.50
.X'±2.0'	.X±0.38
.XX'±1.0'	.XX±0.25
.XXX'±/	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUAD212-CB001D9

PART NO.

CUAD212-XXXX B001DX9X

TITLE.

Conn USB 4.0 TYPE 母座
有后盖 单壳 双贴SMT

