
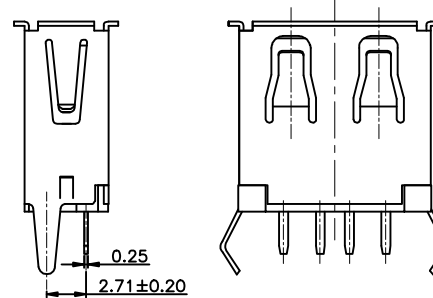


RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.10)

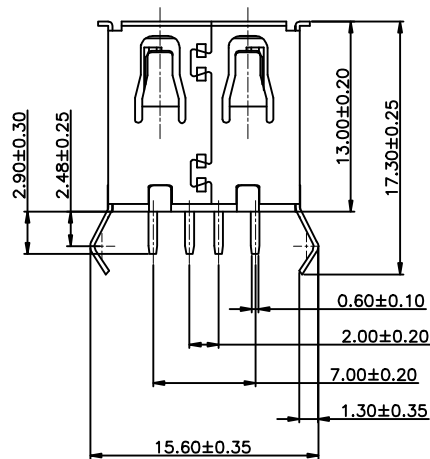

Specifications

Current Rating:1.5AMP at 250V AC
Voltage Rating:30V
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 500V AC
Contact Resistance: 30mΩ Max.
Operating Temperature:−20°C to +60°C
Materials
Contact Material: Brass
Sheel: Brass
Insulator Material: Thermoplastic, UL94V−0 PBT
or the equivalent material
Mechanical Characteristics:
Insertion Force:35 Newtons maximum
Extraction Force:10 Newtons maximum
All materials must meet Greenconn
requirement for environment protection

Ordering Information

CUZA101 - XX XX A003 A X B X

No. of Pins
04

Standard Plating
05=Gold Flash/Tin
64=Gold 3U"/Tin
53=Gold 6U"/Tin
55=Gold 15U"/Tin
58=Gold 30U"/Tin

2=White
1=Black

Standard Packing
B=Tary
Selective Packing
A=Box

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X'±5.0'	X.±0.38
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGN:

DATE:

DWG. NO.

TITLE.

CHECKED:

DATE:

PART NO.

USB A TYPE FEMALE
DIP 180° L=13.0

AUDITED:

DATE:

CUZA101-XXXXA003AXBX

REV.	UNIT.	SCALE.	PAGE.	
01	mm	3:1	1/1	