




PCB LAYOUT(±0.05)

Specifications:

Current Rating: 1.5A AC/DC
Voltage Rating: 30V AC/DC
Contact Resistance: 30m ohm. Max.
Insulation Resistance: 1,000M ohm. min.
Withstanding Voltage: 500V AC For One Minute
Operating Temperature Range: -55°C ~ +85°C

Materials

Contact: Phosphor Bronze
Insulator: PBT UL94V-0
All materials must meet GREENCONN hazardous substances control standards.

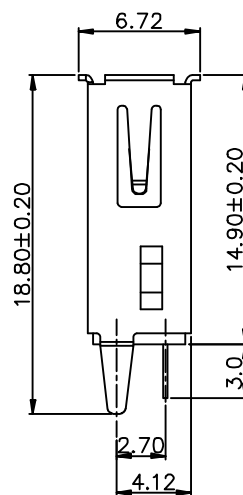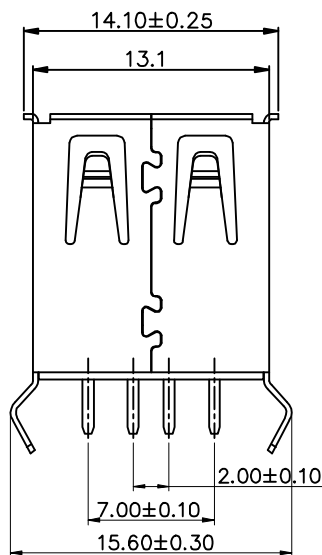

Ordering Information

C UZA189 - 04 XX A 001 A X S X

Standard Plating
02=Gold Flash
Selective Plating
05=Gold Flash/Tin

Color
1=Black
2=White

Standard Packing
B=Tray



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. C UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD. ANG
PROJ.
3RD. ANG
PROJ.

GENERAL TOLERANCE

X.*±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX*±2.0'	.XX±0.20
.XXX*±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZA189-CA001

PART NO.

CUZA189-04XXA001AXSX

TITLE.

USB2.0 AF 180度插板弯脚