

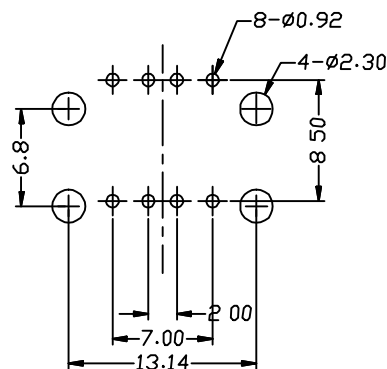
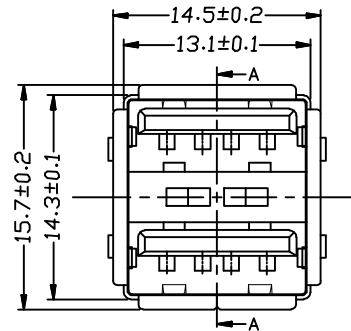
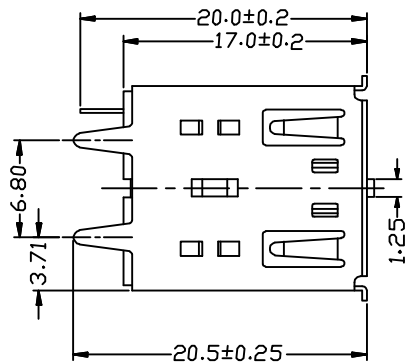


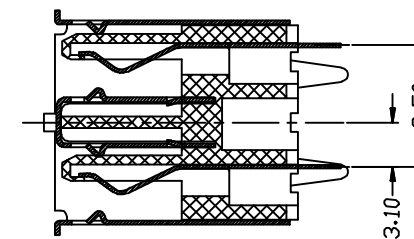

PCB LAYOUT

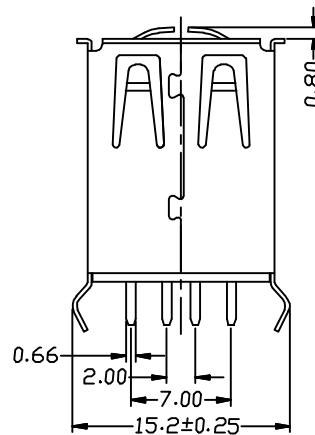

SECTION: A-A

Specifications:

- 1.1 Current rating: 1.5 A
- 1.2 Dielectric withstanding voltage: 500V(ac) for 1 minute
- 1.3 Contact resistance: 30mΩ Max
- 1.4 Insulation resistance: 1000MΩ Min at DC 500V
- 1.5 Total mating force: 3.5Kgf Max
- 1.6 Total unmating force: 1.0 Kgf Min
- 1.7 Temperature range: -55°C~+85°C

Material:

- 1.1 Housing: PBT UL94V-0
- 1.2 Contact: Phosphor Bronze
- 1.3 Shell: Copper Alloy

Ordering Information

C UZA241 - 08 XX A 001 A X S X

No. of pins 08 Standard Plating 02=Gold Flash Selective Plating 01=Tin 05=Gold Flash/Tin Color 2=White Standard Packing B=Tray



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
C	mm	1:1	1/1

3RD.ANG
PROJ.

GENERAL TOLERANCE

X.*±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
CUZA241-CA1AS

PART NO.
CUZA241-08XXA001AXSX

TITLE.
USB AF 180度双插板弯脚双弹17.0