








PCB LAYOUT

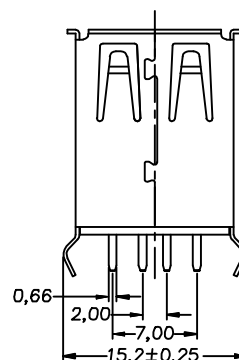

# Specifications:

- 1.1 Current rating: 1 A Max.
- 1.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 1.3 Contact resistance: 30mΩ Max.
- 1.4 Insulation resistance: 1000MΩ Min at DC 500V
- 1.5 Total mating force: 3.5 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.
- 1.7 Temperature range: -45℃~+105℃.

# Material:

- 1.1 Housing: PBT
- 1.2 Contact: Phosphor Bronze
- 1.3 Shell: Copper Alloy

| Pin Number | Signal Name | Pin Number | Signal Name |
|------------|-------------|------------|-------------|
| 1          | VBUS        | 5          | VBUS        |
| 2          | D-          | 6          | D-          |
| 3          | D+          | 7          | D+          |
| 4          | GND         | 8          | GND         |
| Shell      | Shield      |            |             |

# Ordering Information

C UZA241 - 08 XX A 002 A X A X

No. of pins 08 Standard Plating 05=Gold Flash/Tin Selective Plating 02=Gold Flash Color 2=White Standard Packing B=Tray



Website: www.greenconn.com  
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ.  
PAGE. 1/1

# GENERAL TOLERANCE

|            |          |
|------------|----------|
| X.*±5.0'   | X.±0.30  |
| .X'±3.0'   | .X±0.25  |
| .XX*±2.0'  | .XX±0.20 |
| .XXX*±1.0' | .XXX±/   |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZA241-CA002

PART NO.

CUZA241-08XXA002AXAX

TITLE.

USB AF 180度双层插板长体平焊 间距15.2