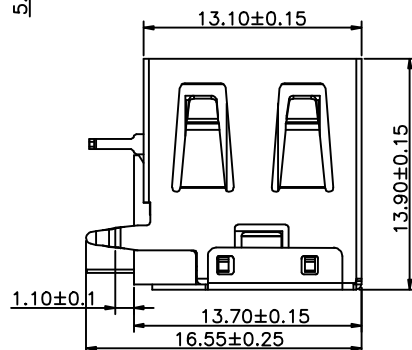
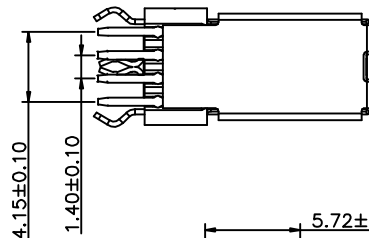
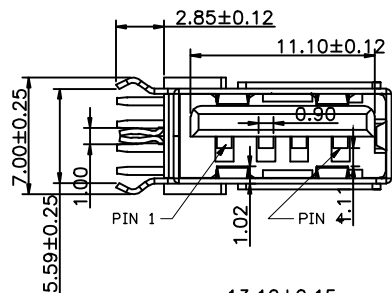


RECOMMEND PCB LAYOUT

Material:
Housing: PBT Black
Contact: Phosphore Bronze
Shell: Copper/SPCC
Mechanical:
Mating: 35N max
Withdrawal Force: 10N min
Durability: 1500 cycles min
Electrical:
current max(amps): 1.5A
Voltage max(volts): 30V
Withstanding Voltage: 750V AC
Contact Resistance(ohm): 30 milliohms max
insulation temperature Range: -55°C to 85°C
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C UZB101 - XX XX A 039 A X A X


No. of Pins per Row 04 Standard Plating 02=Gold Flash 05=Gold Flash/Tin Color 1=Black 2=White Standard Packing B=Tray



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD. ANG PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. ±5.0°	X. ±0.30
.X' ±3.0°	.X ±0.20
.XX' ±2.0°	.XX ±0.10
.XXX' ±1.0°	.XXX ±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZB101-CA039AA

PART NO.

CUZB101-XXXX A039AXAX

TITLE.

USB 2.0 AF90度
侧插直边弯脚0型