

NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

DURABILITY: 3000 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERING TEMPERATURE:-55°C TO +105°C


4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

5.MATERIALS:

HOUSING: LCP UL 94V-0

CONTACT: COPPER ALLOY(C2680+C5191)

SHELL: BRASS

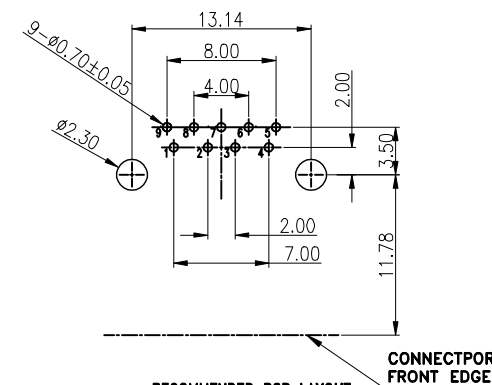

RECOMMENDED PCB LAYOUT

CONNECTOR
FRONT EDGE

Ordering Information

C UZB170 - 09 XX A 002 C X G X

No.of pins
09

Standard Plating
05=Gold Flash/Tin
Selective Plating
02=Gold Flash
58=Gold 30u"/Tin

Color
1=Black
7=Blue


Standard Packing
B=Tray
Selective Plating
D=Tape&Reel



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X'±5.0'	X.±0.50
.X'±3.0'	.X±0.38
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZB170-CA002

PART NO.

CUZB170-09XXA002CXGX

TITLE.

USB 3.0 AF 90度 DIP 弯脚
侧弹朝前 加长款胶芯 脚长2.45