

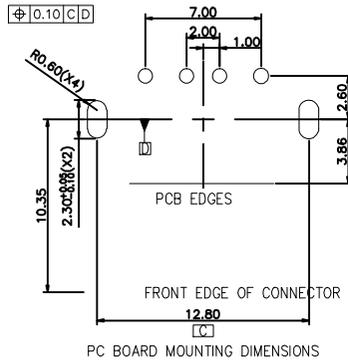


1 2 3 4 5 6 7 8 9

F







Specifications
 CURRENT RATING:2.5A;
 VOLTAGE RATING:250V AC;
 LOW LEVEL CONTACT RESISTANCE:20 mΩ MAX;
 INSULATION RESISTANCE: 1000 MΩ MIN
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 FOR ONE MINUTE

MECHANICAL CHARACTER:
 INSERTION FORCE:35N MAX.;
ENVIRONMENTAL CHARACTER AND OTHERS
 OPERATING TEMPERATURE:-30℃+85℃;
 STORAGE TEMPERATURE:-40℃N+90℃;

Materials
 HOUSING: LCP E130i+G.F.30%,UL94V-0
 CONTACT: PHOSPHOR BRONZE C5210
 SHELL:STAINLESS STEEL SUS301


All materials must meet GREENCONN hazardous substances control standards.

E

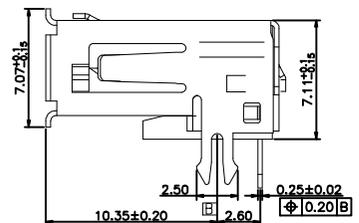

D

C



Ordering Information

C UZB175 - XX XX B 001 C X A X

No. of Pins Row 04 Standard Plating 05=Gold Flash/Tin Color 1=Black Standard Packing B=Tray

B

A



REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X. ±5.0'	X. ±0.50
.X' ±3.0'	.X ±0.30
.XX' ±/	.XX ±0.20
.XXX' ±/	.XXX ±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
CUZB175-CB001CA
PART NO.
CUZB175-XXXX B001CXAX

NAME	Q'TY	MATERIAL	REMARK
SHELL	1	STAINLESS STEEL	NICKEL PLATING
CONTACT	4	PHOSPHOR BRONZE	AU OVER Ni
HOUSING	1	THERMOPLASTIC	N/A

TITLE.
USB AF 90度插板鱼叉
脚有卷边有后盖 L=14.35

1 2 3 4 5 6 7 8 9