

| Pin NUMBER | SIGNAL NAME |
|------------|-------------|
| 1          | VBUS        |
| 2          | D-          |
| 3          | D+          |
| 4          | GND         |
| Shell      | Shield      |

#### SPECIFICATIONS:

Contact current Rating:1.5 Amperes for pin1&pin4.  
Dielectric Withstanding Voltage:AC 500V(RMS)  
Insulation resistance:1000Megohms Minimum.  
Contact Resistance: 30mΩ Max for pin1&pin4

#### Mechanical Characteristics:

Mating Force:35 Newtons.Maximum  
Unmating Force:10 Newtons.Minimum.

#### MATERIAL:





Housing: PA9T 94V-0 COLOR:BLACK

Contact: copper alloy( T=0.25mm)

Shell: SPCC

operating Temperature:-55° to+85°

All materials must meet GREENCONN hazardous substances control standards.

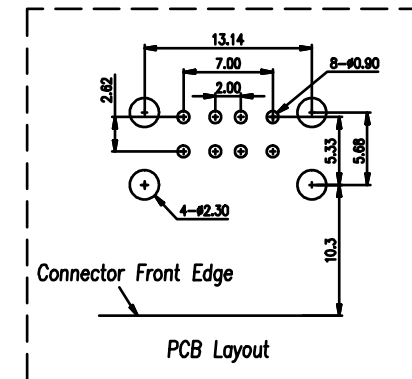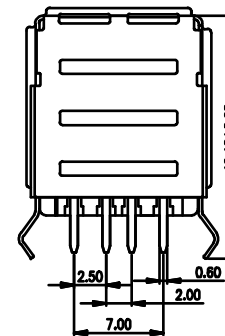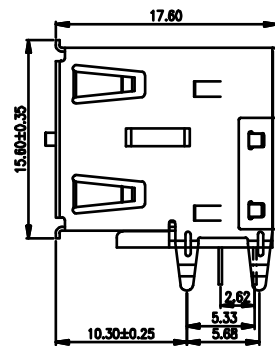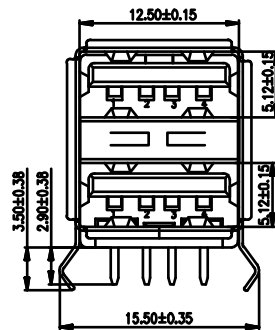

#### Ordering Information

|                           |        |   |    |                                                                             |   |                  |   |                            |   |   |
|---------------------------|--------|---|----|-----------------------------------------------------------------------------|---|------------------|---|----------------------------|---|---|
| C                         | UZB268 | - | 04 | XX                                                                          | A | 001              | D | X                          | S | X |
| No. of Pins per Row<br>04 |        |   |    | Standard Plating<br>05=Gold Flash/Tin<br>Selective Plating<br>02=Gold Flash |   | Color<br>1=Black |   | Standard Packing<br>B=Tray |   |   |



Website:www.greenconn.com  
E-mail:sales@greenconn.com

| REV.          | 01  | UNIT. | mm | SCALE. | 1:1 |
|---------------|-----|-------|----|--------|-----|
| 3RD.ANG PROJ. |     |       |    |        |     |
| PAGE.         | 1/1 |       |    |        |     |

#### GENERAL TOLERANCE

|            |           |
|------------|-----------|
| X.# 5.0°   | X.?.50    |
| .X# 3.0°   | .X?.38    |
| .XX# 2.0°  | .XX?.25   |
| .XXX# 1.0° | .XXX?. 15 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZB268-CA1DS

PART NO.

CUZB268-04XXA001DXSX

TITLE.

USB AF 2.0 双层 90°DIP  
弯脚双排