

1 2 3 4 5 6 7 8 9

F



E

D






C

B

A

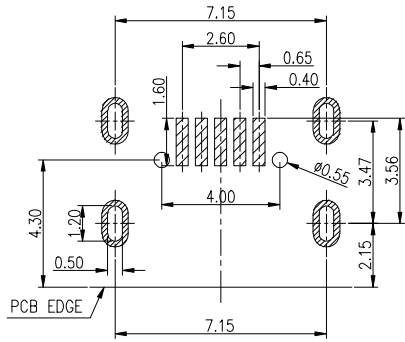

RECOMMENDED PCB LAYOUT  
PCB图仅供参考




SECTION A-A

- Note:
- Material:
    - Housing: High temperature thermoplastic LCP Black with g.f,UL94v-0
    - Contact: copper alloy,C5191R-EH t=0.20mm
    - Shell: copper alloy,C2680R t=0.25mm
  - Specification:
    - Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
    - Dielectric withstanding voltage: 100 V(ac) for 1 min.
    - Contact resistance: 30 mΩ Max.
    - Insulation resistance: 100 MΩ Min.
    - Total mating force: 3.57 Kgf Max.
    - Total unmating force: 1.0 Kgf Min.
    - Temperature range: -30°C~80°C

All materials must meet GREENCONN hazardous substances control standards.

### Ordering Information

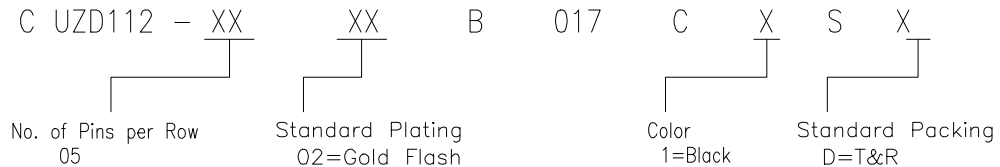

格稜股份有限公司  
**Greenconn Corporation**

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	

GENERAL TOLERANCE	
X: ±/	X ±/
.X' ±/	.X ±0.15
.XX' ±/	.XX ±0.10
.XXX' ±/	.XXX ±/

DESIGN:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	CUZD112-CB17CS
PART NO.	CUZD112-XXXXB017CX SX

TITLE:  
**Micro usb 5P B Type插板  
7.2有柱**

1 2 3 4 5 6 7 8 9