






1 2 3 4 5 6 7 8 9

F

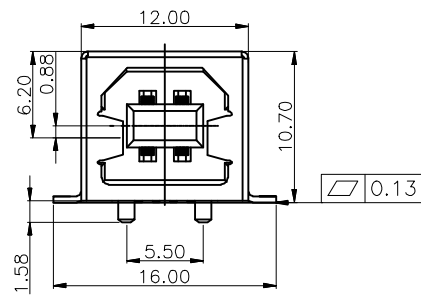

Specifications:  
 Current Rating:1.5A AC,DC  
 Voltage Rating:30V AC,DC  
 Contact Resistance:30m Ohm Max  
 Insulation Resistance:1,000M Ohm Min  
 Withstanding Voltage:750V AC/Minute  
 Operating Temperature Range:-40°C to +105°C  
 Materials:  
 Insulator:High Temp.Plastic (PA9T UL94V-0)  
 Contact:Phosphor Bronze  
 Plating:Gold Plated on Contact Area,  
 Tin Plated on Solder Tail.  
 Shell:Brass  
 All materials must meet GREENCONN  
 hazardous substances control standards.

E

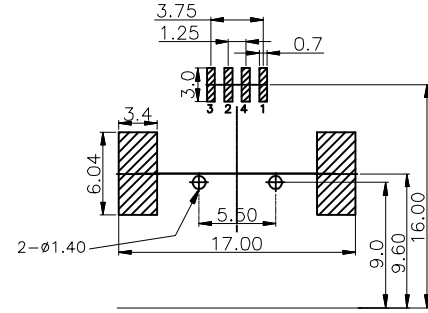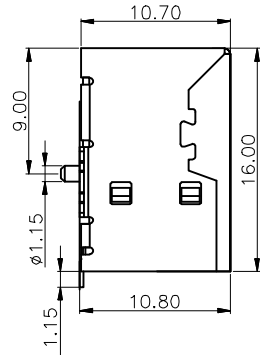


PCB Layout

D

C

B

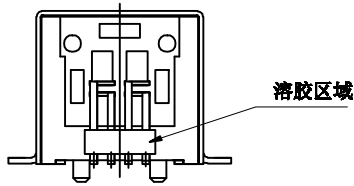

**Ordering Information**

CUZD185- 04 XX B 001 D X S X

Standard Plating  
 05=Gold flash/Tin  
 Selective Plating  
 02=Gold Flash

COLOR  
 2=White

Standard Packing  
 B=Tray  
 Selective Packing  
 D=Tap&Reel

A

<p>Website:www.greenconn.com E-mail:sales@greenconn.com</p>			3RD.ANG PROJ.		GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CUZD185-CB001	TITLE. USB BF 90° SMT 带柱
					X:±5.0'	X.±/				
REV.	UNIT.	SCALE.	PAGE.	1/1	.X'±3.0'	.X±0.30	APPROVED:	DATE:	PART NO. CUZD185-04XXB001DXSX	
01	mm	1:1			.XX'±2.0'	.XX±0.25	.XXX'±1.0'	.XXX±0.15		DATE:

1 2 3 4 5 6 7 8 9