


Specifications
 Insulation Resistance:1000 MEGA ohms Min.
 Dielectric Withstanding Voltage:500V AC AT Sea Level
 Contact Resistance:30millionms Max.
Material
 Contact Material:Brass
 Insulation Material:UL94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C UZD1A1 - XX XX B 001 C X B X


No. of Pins Row 04 Standard Plating 05=Gold Flash/Tin Color 1=Black Standard Packing B=Tray

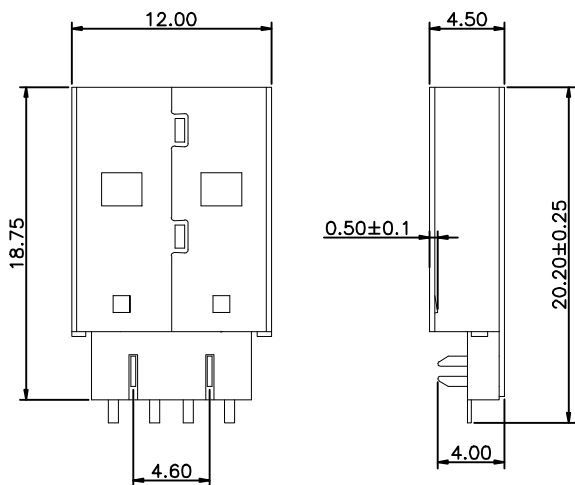

Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CUZD1A1-CB001

PART NO.

CUZD1A1-XXXX B001CXBX

TITLE.

USB AM 90度沉板金叉脚无柱
 L20.2