
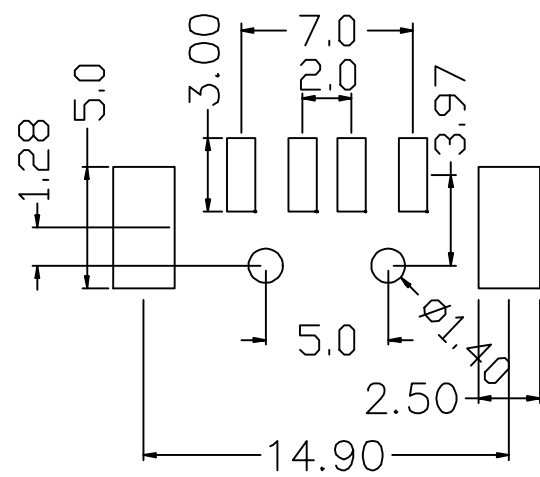
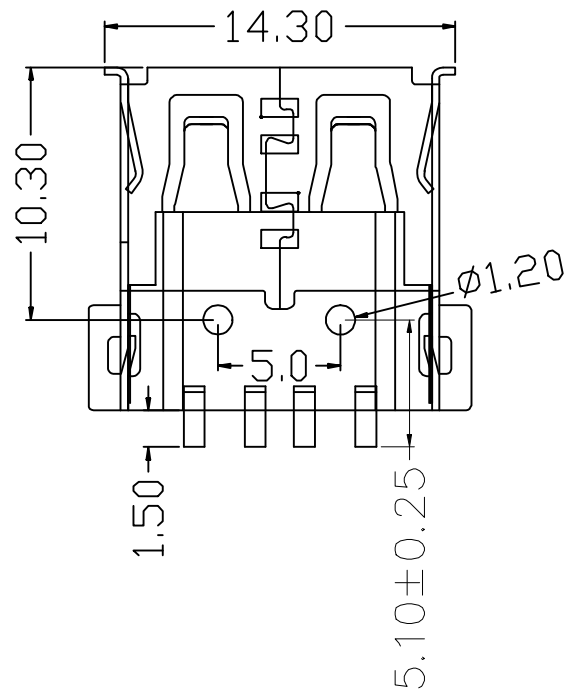
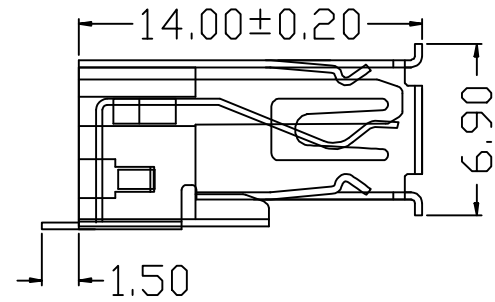


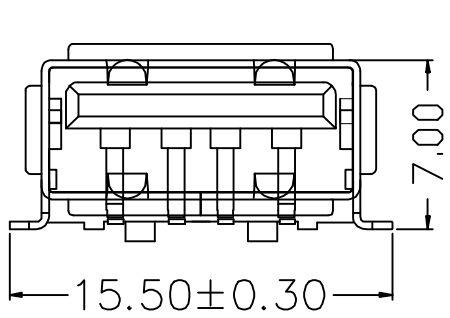

规格说明: Specifications:
电气特性: Electrical:
1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN
物理性能: Mechanical:
1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)
原材料: Material:
1. 塑胶: Housing: LCP UL 94V-0
2. 端子: Contact: Copper Alloy
电镀: Finish:
1. 端子: Contact: See Part Number
2. 外壳: Shell: 铜壳四周镀80U"(MIN)锡
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C UZD1A7 - 04 XX B 001 C X B X
No. of Pins 04
Standard Plating 05=Gold Flash/Tin Selective Plating 75=Gold Flash/Matte Tin
Color 1=Black
Standard Packing D=Tape&Reel

Greenconn
Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX*±2.0'	.XX±0.25
.XXX*±1.0'	.XXX±0.15

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
CUZD1A7-CB001CB
PART NO.
CUZD1A7-04XXB001CXBX

TITLE.
USB AF SMT 柱D1.2 有卷边