

Ordering Information

C UZD221 - XX XX A 001 C X Z X

No. of Pins Row 22 Standard Plating 09=Gold 3U"
 Color 1=Black Standard Packing D=T&R

Website: www.greenconn.com
 E-mail: sales@greenconn.com


REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1
--------	----------	------------	-----------

GENERAL TOLERANCE	
X'±5'	X.±0.50
.X'±2'	.X±0.38
.XX'±1'	.XX±0.25
.XXX'±/	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
 CUZD221-CA001CZ
 PART NO.
 CUZD221-XXXX A001CXZX

TITLE.
 USB 3.1 TYPE C 24P
 母座 双排SMT 板上 L=7.9

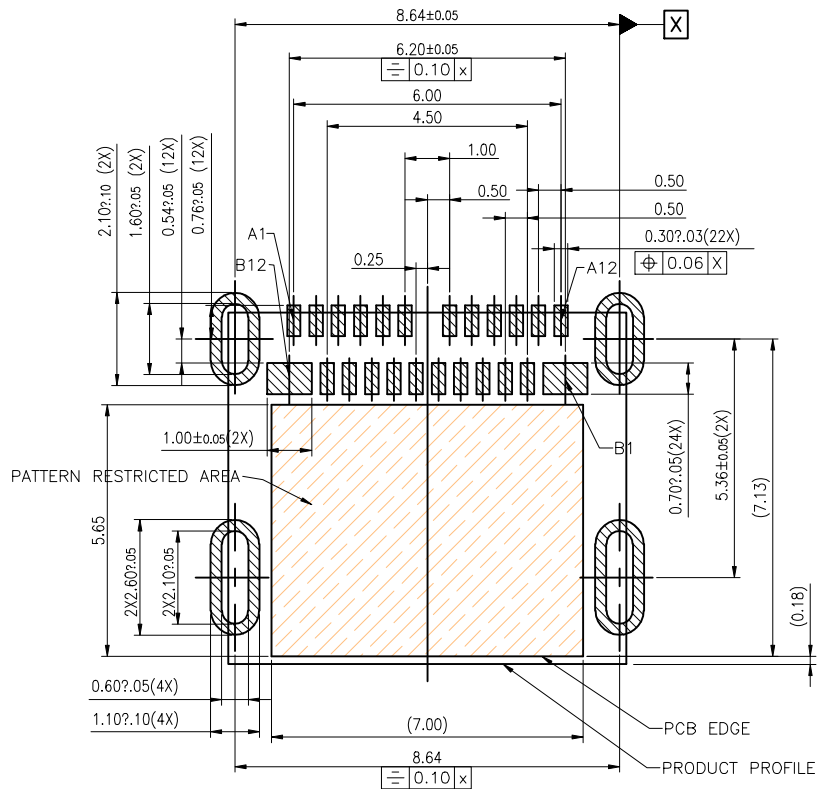

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE:±0.05

Specifications
 CURRENT RATING: 5.0A FOR VBUS PINS (Pin A4,A9,B4.89)
 1.25A FOR GND PINS (PIN A1,A12,B1,B12)
 0.25A FOR OTHER PINS (PIN A1,A12,B1,B12)
 INSULATION RESISTANCE:100MΩ MIN.
 DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 OPERATING TEMPERATURE: -30℃~+85℃.

Materials
 HOUSING:LCP UL94 V-0
 CONTACTS:C7025
 EMI SPRING: SUS304-1/2H T=0.10mm
 FRONT SHELL:SUS304-1/2H T=0.3mm
 MIDDLE BLADE:SUS304-H T=0.15
 All materials must meet GREENCONN
 hazardous substances control standards.

PIN ASSIGNMENT											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1



3RD.ANG
 PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X'±5'	X.±0.50
.X'±2'	.X±0.38
.XX'±1'	.XX±0.25
.XXX'±/	.XXX±/

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 CUZD221-CA001CZ
 PART NO.
 CUZD221-XXXX A001CXZX

TITLE.
 USB 3.1 TYPE C 24P
 母座 双排SMT 板上 L=7.9

REV. A

UNIT. mm

SCALE. 1:1