

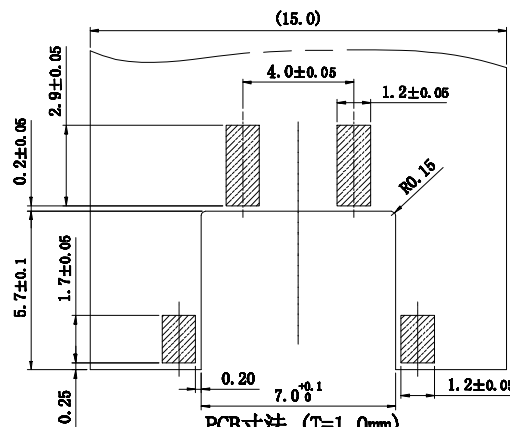
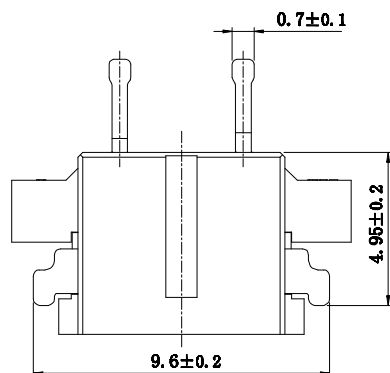
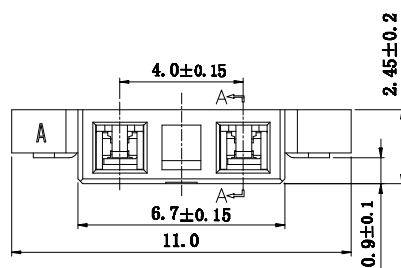
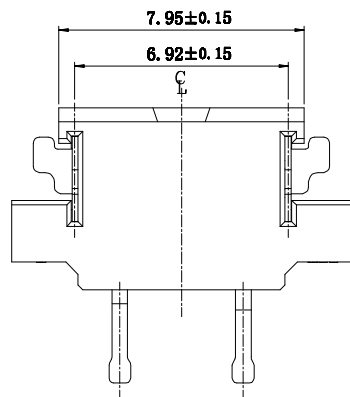
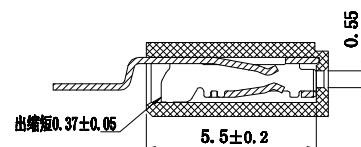


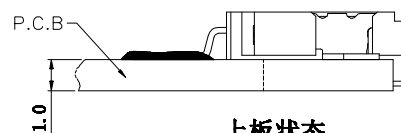



PCB 寸法 (T=1.0mm)
PCB Layout (T=1.0mm)



SECTION A-A

NOTES:

- MATERIAL
 - 1-1. HOUSING: LCP (UL94V-0)
 - 1-2. CONTACT: PHOSPHOR BRONZE
 - 1-3. FITTING NAIL: PHOSPHOR BRONZE
- PLATING: SEE PART NUMBER
- RATING
 - 3-1. OPERATING TEMPERATURE: -40~125°C
 - 3-2. OPERATING VOLTAGE: 400V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 1800V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 1000MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;

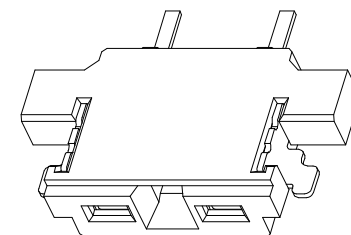

Ordering Information

C WKD102-02 XX A 001 C X A X

Standard Plating
22=Matte Tin
Selective Plating
01=Tin
02=Gold Flash

Color
1=Black
2=White

Standard Packing
D=Tape&Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD. ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X'±3.0'	X.±/
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.20
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CWKD102-CA001

PART NO.

CWKD102-02XXA001CXAX

TITLE.

4.0 CONN. SMT SINGLE ROW RIGHT-ANGLE