

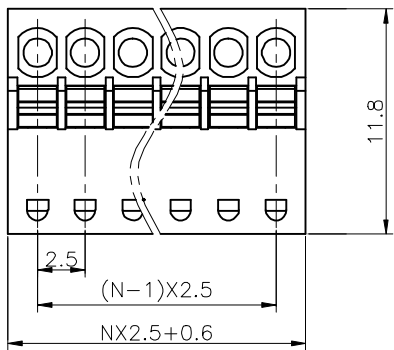


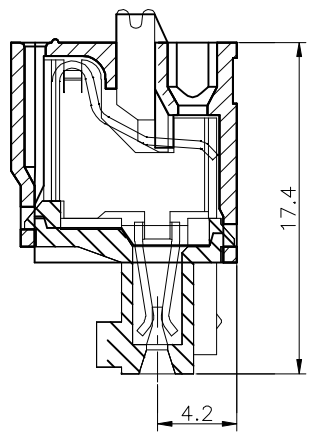

N=Number of contacts

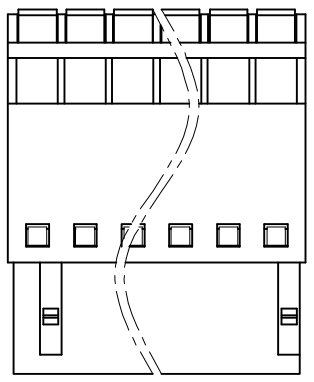

Specifications
Voltage rating:300VAC
Current rating:12 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: 2500VAC(1min)
Test time:60sec/1pcs
wire range: 16~24AWG
Mechanical:
Torque:/
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

C XGZ101 - XX XX A 001 E X Z X
No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Carton

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X: ±2.0°	X: ±0.50
.X: ±/	.X: ±0.30
.XX: ±/	.XX: ±0.20
.XXX: ±/	.XXX: ±/

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO. CXGZ101-CA1EZ
PART NO. CXGZ101-XXXXA001EXZX

TITLE.
pitch 2.5mm series

REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
--------	----------	------------	-----------	--