

1 2 3 4 5 6 7 8 9

F



E

D


C

B

A

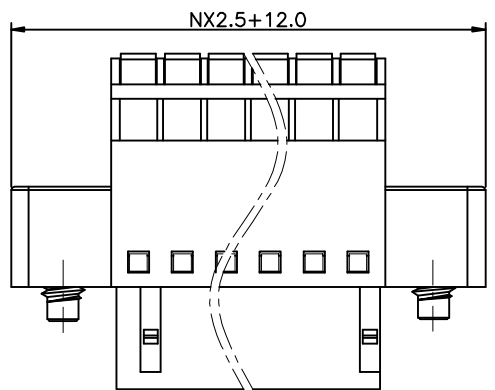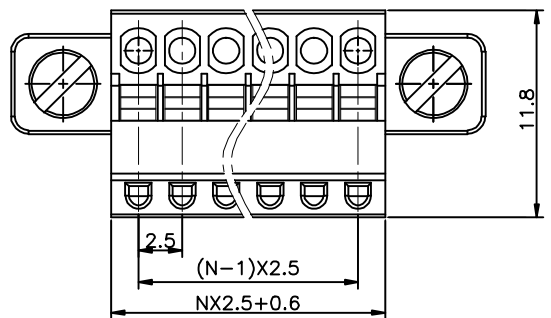

N=Number of contacts

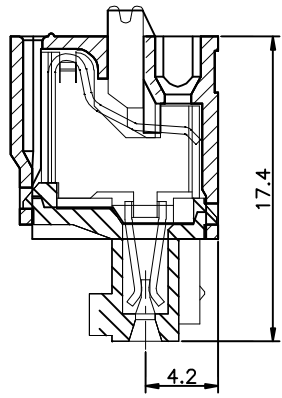

Electrical
 Voltage rating:300VAC
 Current rating:12 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)Test time:60sec/1pcs
 Wire range: 16-24AWG
 Mechanical:/
 Operating temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

CXGZ102 - XX XX A 001 E X B X
 No. of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Cartons

Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
 CXGZ102-CA001EB
 PART NO.
 CXGZ102-XXXXA001EXBX

TITLE.
 Pitch2.5m-series

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A