







PCB LAYOUT(± 0.05)

Specifications
Voltage rating:150VAC
Current rating:2 Amps/way max
Contact resistance: 20m Ω (max)
Insulation resistance: 5000M Ω /1000V
Withstanding Voltage: 2500VAC(1min)
Test time:60sec/1pcs
wire range: 20-26AWG
Mechanical:
Torque:/
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

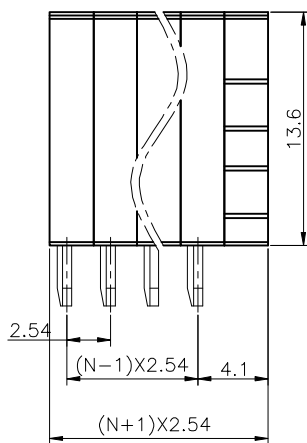

N=Number of confacs

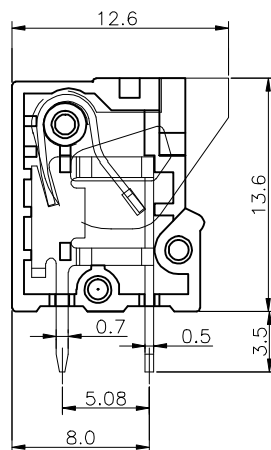

Ordering Information

C XHB201 - XX XX A 001 E X Z X
No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Carton

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.' ± 2.0 '	X. ± 0.50
.X' $\pm$ /	.X ± 0.30
.XX' $\pm$ /	.XX ± 0.20
.XXX' $\pm$ /	.XXX $\pm$ /

DESIGN:

DATE:

DWG. NO.

CXHB201-CA1EZ

TITLE.

pitch 2.54mm - series

CHECKED:

DATE:

PART NO.

CXHB201-XXXXA001EXZX

AUDITED:

DATE:

REV.
A

UNIT.
mm

SCALE.
4:1

PAGE.
1/1



1

2

3

4

5

6

7

8

9