
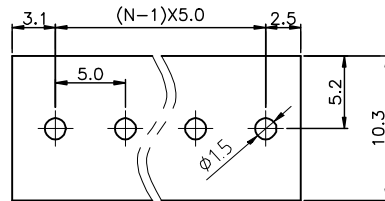



N=Number of contacts

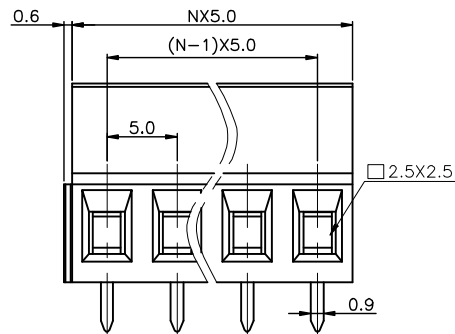

P.C.B LAYOUT

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 12-30AWG
 Mechanical:
 Torque:5.0kgf.cm/M3
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C XLB107 - XX XX A 001 E X Z X
 No. of Pins per Row 02~24 Standard Plating 01=Tin Color 7=Blue G=Green Standard Packing R=Carton Selective Packing N=PE Bag



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1 3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X.±1.0'	X.±0.50
.X'±/	.X±0.30
.XX'±/	.XX±0.20
.XXX'±/	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXLB107-CA001

PART NO.

CXLB107-XXXXA001EXZX

TITLE.

Series Pitch 5.00mm