
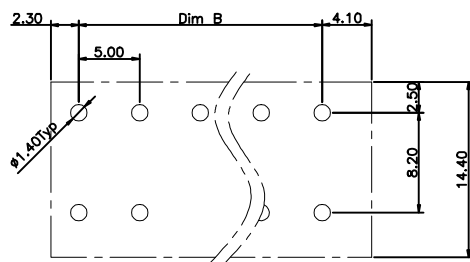



N=Number of contacts

Poles	Tolerance
1P-6P	±0.10
7P-12P	±0.20
13P-18P	±0.30
19P-24P	±0.40

Specifications
 Voltage rating:300VAC
 Current rating(Sol):13 A
 Current rating(Str):16 A
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 1.6kV
 Solid wire range: 14-24AWG
 Stranded wire range: 12-24AWG
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+115°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

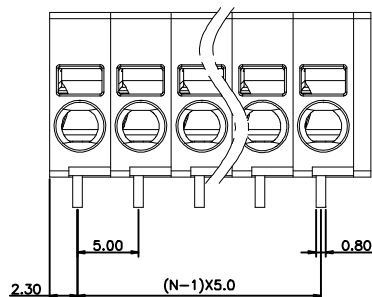

P.C.B LAYOUT
Top view

Ordering Information

C XLB203 - XX XX A 001 E X B X

No. of Pins per Row
01~24

Standard Plating
01=Tin

Color
1=Black
2=White
3=Yellow
6=Gray
7=Blue
A=Orange
G=Green
R=Red


Standard Packing
R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.



GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXLB203-CA001EB

PART NO.

CXLB203-XXXX A001EXBX

TITLE.

5.00 Series 1P-24P
Horizontal (180D wpre inlet)