




1 2 3 4 5 6 7 8 9

F

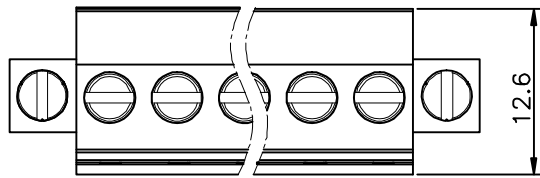

E

N=Number of contacts

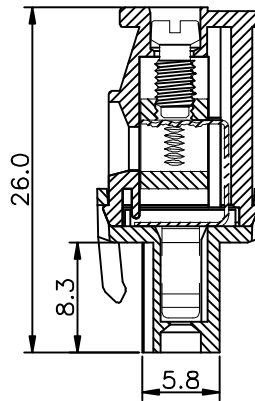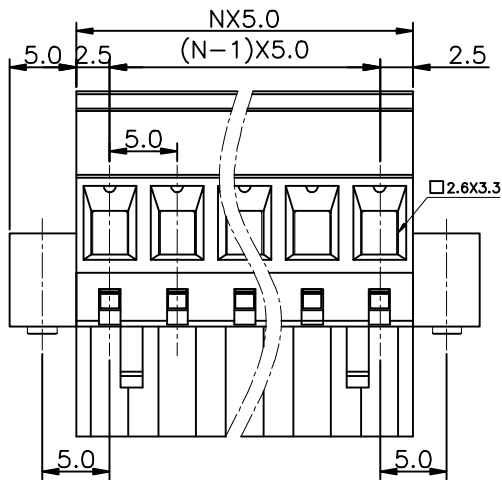


Electrical  
 Voltage rating:300VAC  
 Current rating:16 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs  
 wire range: 12-26AWG  
 Mechanical:  
 Torque:5.0kg/cm/M3  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN  
 hazardous substances control standards.

D

C

B

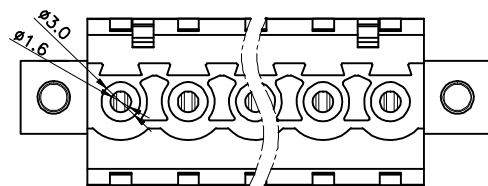

### Ordering Information

CXLZ106 - XX XX A 002 E X B X

No.of Pins Per Row 02~24      Standard Plating 01=Tin      Color 7=Blue G=Green      Standard Packing R=Cartons

A

**Greenconn**  
 Website:www.greenconn.com  
 E-mail:sales@greenconn.com

3RD.ANG  
 PROJ.  
  
 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:  
 CHECKED:  
 APPROVED:

DATE:  
 DATE:  
 DATE:

DWG. NO.  
 CXLZ106-CA002EB  
 PART NO.  
 CXLZ106-XXXXA002EXBX

TITLE.  
 Pitch5.0mm-series

REV.	UNIT.	SCALE.
A	mm	1:1

1 2 3 4 5 6 7 8 9