
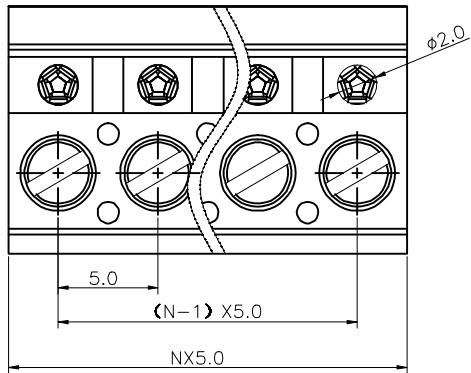


N=Number of contacts

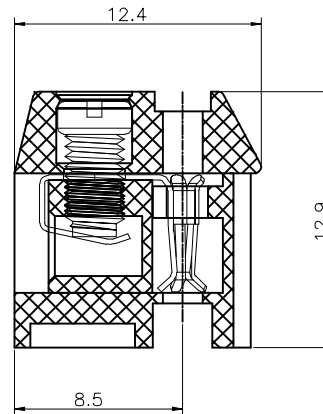

Specifications
Voltage rating:300VAC
Current rating:10 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: 2500VAC(1min)
Test time:60sec/1pcs
wire range: 14–22AWG
Mechanical:
Torque:3.0kgf.cm/M4
Operating temperature:–40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V–0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

C XLZ109 – XX XX A 001 E X Z X
No. of Pins per Row 02~24 Standard Plating 01=Tin Color 1=Black 6=Grey 7=Blue G=Green Standard Packing R=Carton



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

3RD.ANG
PROJ.
3RD.ANG
PROJ.

GENERAL TOLERANCE

X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXLZ109–CA1EZ

PART NO.

CXLZ109–XXXXA001EXZX

TITLE.

Pitch 5.0mm Series