
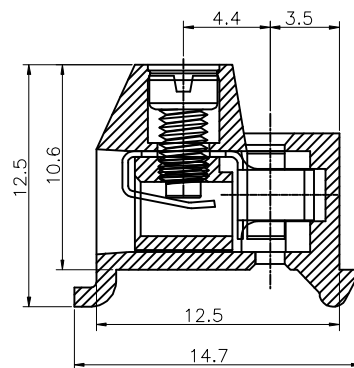
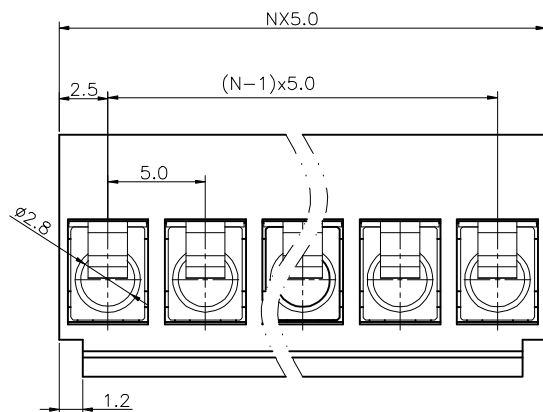


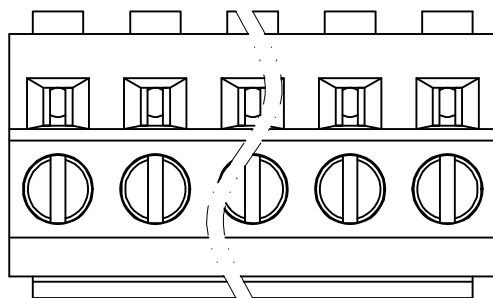

Specifications
 Voltage rating:300VAC
 Current rating:10 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 14~22AWG
 Mechanical:
 Torque:3.0kgf.cm/M4
 Operating temperature: -40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C XLZ110 - XX XX A 001 E X Z X

No. of Pins per Row
02~24

Standard Plating
01=Tin

Color
1=Black
6=Grey
7=Blue
G=Green


Standard Packing
R=Carton



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±2.0'	X.±0.50
.X'±	.X±0.30
.XX'±	.XX±0.20
.XXX'±	.XXX±

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXLZ110-CA001EZ

PART NO.

CXLZ110-XXXXA001EXZX

TITLE.

Pitch 5.0mm Series