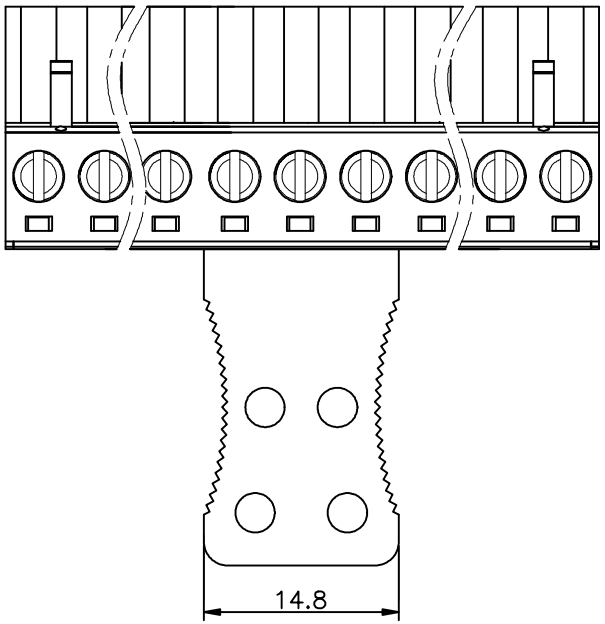

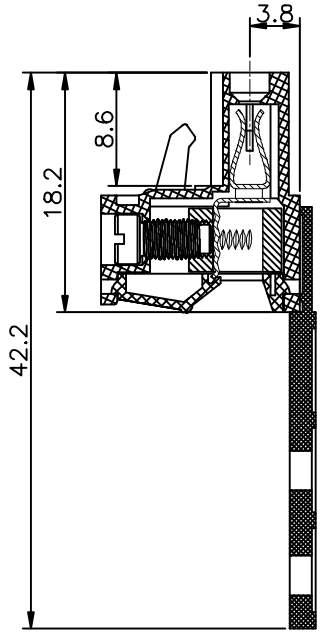

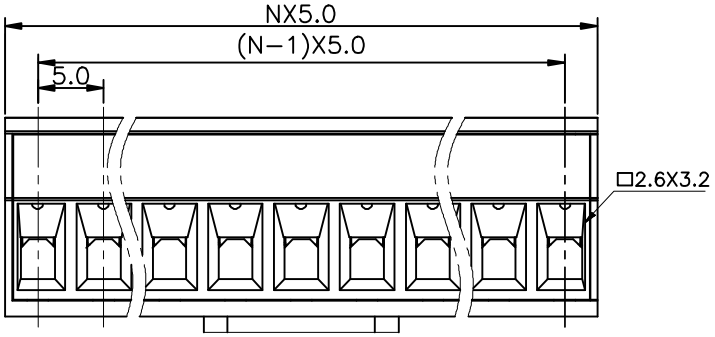

Electrical
Voltage rating:300VAC
Current rafinq:16 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
Withstanding Voltage: 1500VAC(1min) Test time:60sec/1pcs
Wire range: 12−26AWG
Mechanical:
Torque:5.0kgf.cm/M3
Operating temperature:−40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V−0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

CXLZ111 − XX XX A 002 E X B X

- XX: No.of Pins Per Row 03~24
- XX: Standard Plating 01=Tin
- E X: Color 1=Black 7=Blue G=Green
- B X: Standard Packing R=Cartons

Greenconn Website:www.greenconn.com E−mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CXLZ111−CA002EB	TITLE. Pitch5.0mm−series−带手柄
		X.°±5.0°	X.±0.50	CHECKED:	DATE:		
		.X°±3.0°	.X±0.30			PART NO.	
		.XX°±2.0°	.XX±0.20	APPROVED:	DATE:	CXLZ111−XXXXA002EXBX	
REV. A / UNIT. mm / SCALE. 1:1	PAGE. 1/1	.XXX°±1.0°	.XXX±/				