


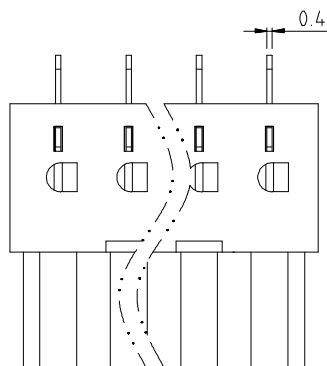


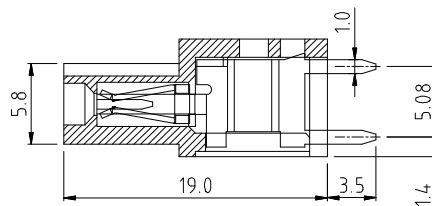

N=Number of contacts

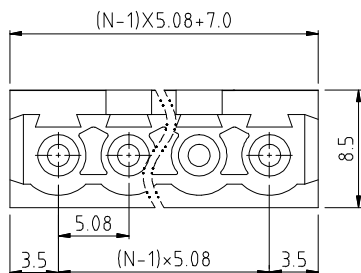

P.C.B LAYOUT

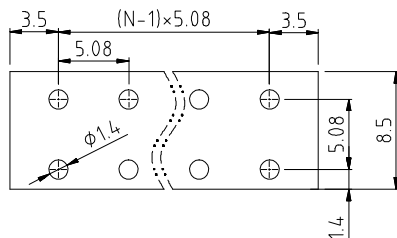

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: /
 Mechanical:
 Torque:/
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

CXMA110 - XX XX A 001 E X B X

No.of Pins Per Row 02~20 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Cartons



REV. A UNIT. mm SCALE. 1:1

3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CXMA110-CA001EB
PART NO.
CXMA110-XXXXA001EXBX

TITLE.
F75 -2 - pitch 5.08mm-
series Without flange-180D
(去卡勾)