




N=Number of confacfs

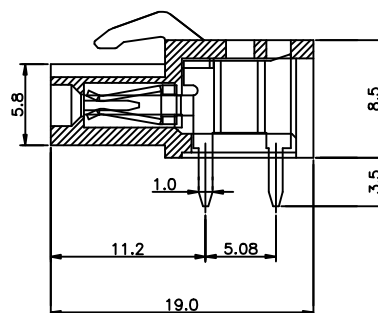

P.C.B. LAYOUT

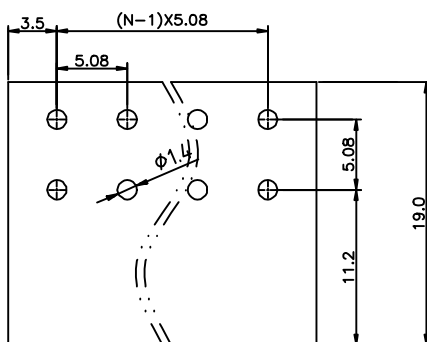

Specifications
Voltage rating:300V AC
Current rating; 16 Amps/way max
Contact resistance: 20mΩ(max)
Insulation resistance: 5000MΩ/1000V
withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs
Mechanical:
Torque:/
Operating temperature:-40°C to+105°C
Materials
Contact Material:Brass
Insulator Material: UL 94V-0 PA66
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

CXMB110 - XX XX A 001 E X B X

No.of Pins Per Row 02~20
Standard Plating 01=Tin
Color 1=Black 7=Blue G=Green
Standard Packing R=Cartons



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0°	X.±0.50
.X'±3.0°	.X±0.30
.XX'±2.0°	.XX±0.20
.XXX'±1.0°	.XXX±/

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CXMB110-CA001EB
PART NO.
CXMB110-XXXXA001EXBX

TITLE.
Pitch5.08mm-series
Without flange-90°