


1 2 3 4 5 6 7 8 9


F

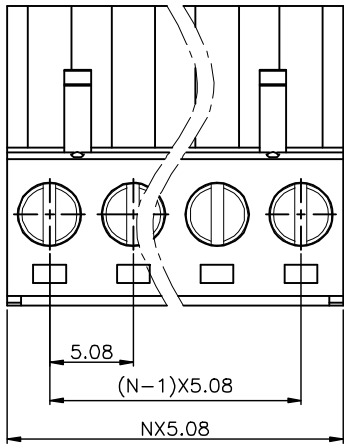


E

D

C

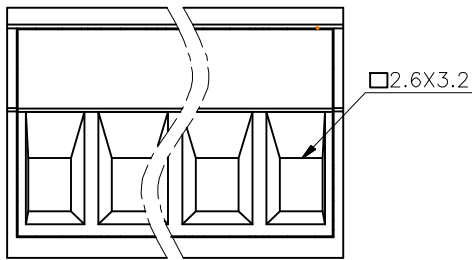

N=Number of contacts

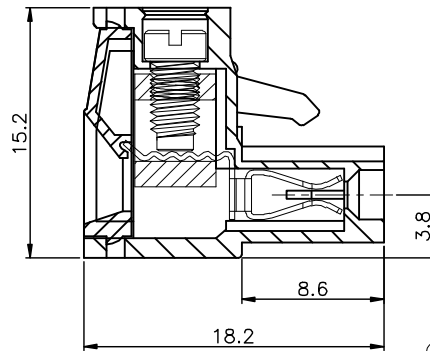

Specifications  
 Voltage rating:300VAC  
 Current rating:16 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)  
 Test time:60sec/1pcs  
 wire range: 12-26AWG  
 Mechanical:  
 Torque:5.0kgf.cm/M3  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN  
 hazardous substances control standards.

B

### Ordering Information

C XMZ101 - XX XX A 006 E X Z X

No. of Pins per Row 02~24      Standard Plating 01=Tin      Color 1=Black 6=Gray 7=Blue G=Green      Standard Packing R=Carton Selective Packing N=PE Bag

A



Website:www.greenconn.com  
 E-mail:sales@greenconn.com

REV. A    UNIT. mm    SCALE. 1:1

3RD.ANG PROJ.  
    PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:  
 CHECKED:  
 APPROVED:

DATE:  
 DATE:  
 DATE:

DWG. NO. CXMZ101-CA6EZ  
 PART NO. CXMZ101-XXXXA006EXX

TITLE. Pitch 5.08mm series

1 2 3 4 5 6 7 8 9