


1 2 3 4 5 6 7 8 9

F

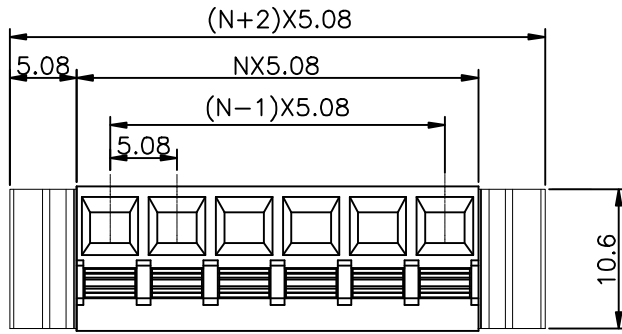


Specifications  
 Voltage rating:300VAC  
 Current rating: 16 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs  
 Wire range: 12-26AWG  
 Mechanical:  
 Torque:/  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

E

D


N=Number of contacts

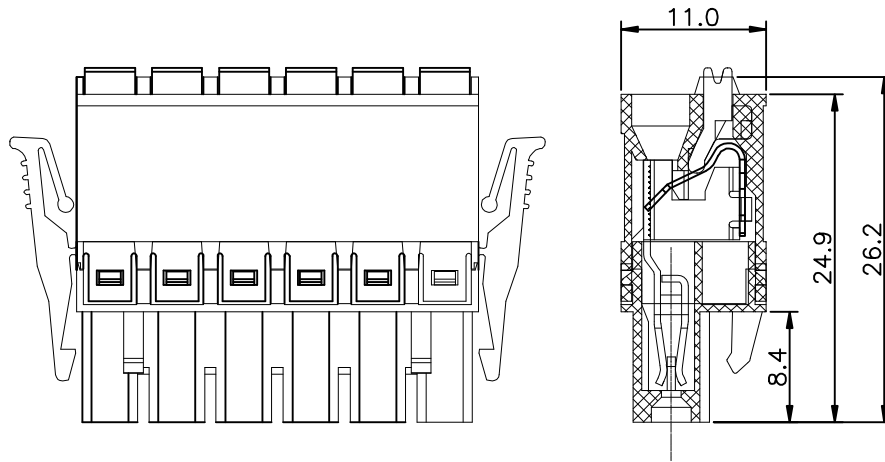

C

B

### Ordering Information

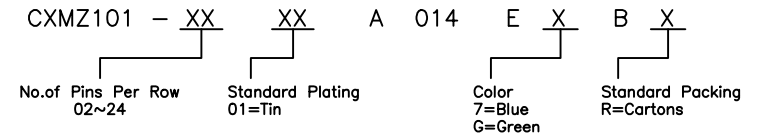

A

 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE X:±5.0' X:±0.50 .X'±3.0' .X±0.30 .XX'±2.0' .XX±0.20 .XXX'±1.0' .XXX±/		DESIGNED:	DATE:	DWG. NO. CXMZ101-CA014EB	TITLE. Pitch5.08mm-series(加卡物)
		REV. A	UNIT. mm	SCALE. 1:1	CHECKED:		

1 2 3 4 5 6 7 8 9