

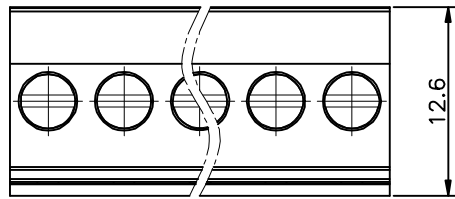
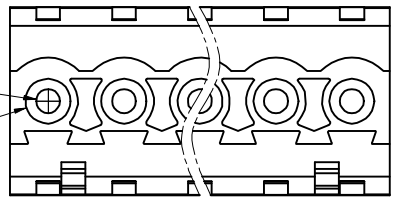


F
E
D
C
B
A

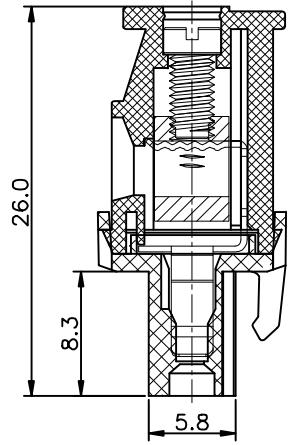

N=Number of contacts

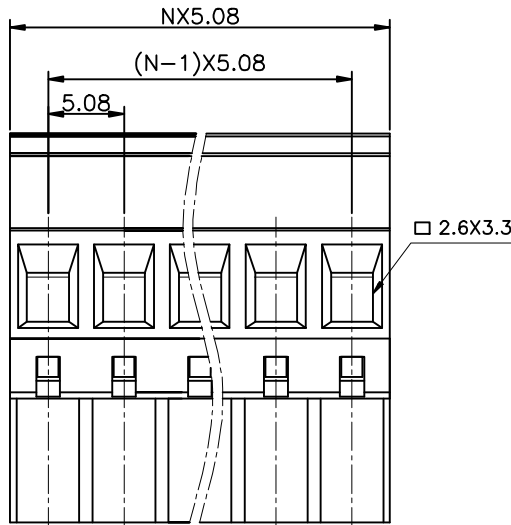

Specifications
 Voltage rating:300VAC
 Current rating:16 Amps/way max
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: 2500VAC(1min)
 Test time:60sec/1pcs
 wire range: 12-26AWG
Mechanical:
 Torque:5.0kgf.cm/M3
 Operating temperature:-40°C to+105°C
Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C XMZ102 - XX XX A 001 E X Z X

No. of Pins per Row 02~24 Standard Plating 01=Tin

Color 7=Blue G=Green Standard Packing R=Carton

A			3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE		DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. CXMZ102-CA1EZ	TITLE. pitch 5.08mm - series
	Website:www.greenconn.com	E-mail:sales@greenconn.com		X:±5.0'	X:±0.50			PART NO. CXMZ102-XXXXA001EXZX	
	REV. A	UNIT. mm		SCALE. 1:1	.X'±3.0'			.X±0.30	
					.XX'±2.0'			.XX±0.20	
			.XXX'±1.0'	.XXX±/					