
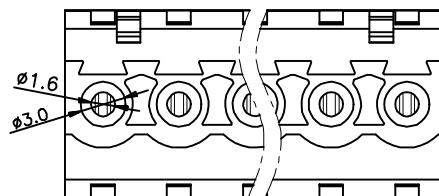
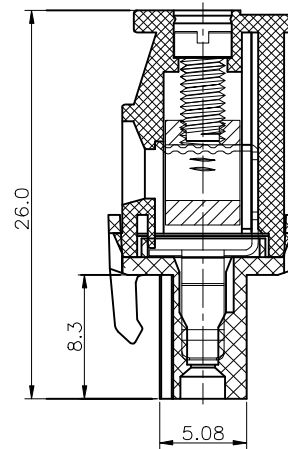


N=Number of confacts

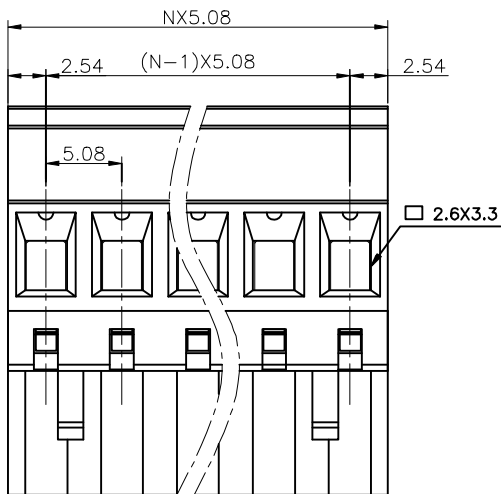

Specifications  
 Voltage rating:300VAC  
 Current rating:16 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min)  
 Test time:60sec/1pcs  
 wire range: 12-26AWG  
 Mechanical:  
 Torque:5.0kgf.cm/M3  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN  
 hazardous substances control standards.

## Ordering Information

C XMZ103 - XX XX A 001 E X Z X

No. of Pins per Row 02~24  
 Standard Plating 01=Tin  
 Color 7=Blue G=Green A=Orange  
 Standard Packing R=Carton



Website:www.greenconn.com  
 E-mail:sales@greenconn.com

REV. B UNIT. mm SCALE. 1:1

3RD.ANG  
 PROJ.  
 PAGE. 1/1

### GENERAL TOLERANCE

|            |          |
|------------|----------|
| X.±5.0'    | X.±0.50  |
| .X'±3.0'   | .X±0.30  |
| .XX'±2.0'  | .XX±0.20 |
| .XXX'±1.0' | .XXX±/   |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CXMZ103-CA1EZ

PART NO.

CXMZ103-XXXXA001EXZX

TITLE.

pitch 5.08mm - series