

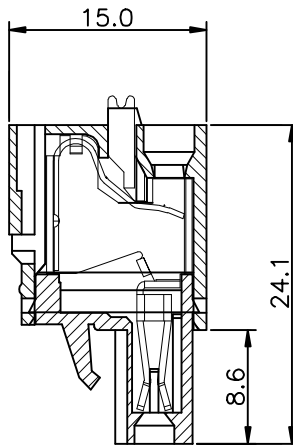


N=Number of contacts

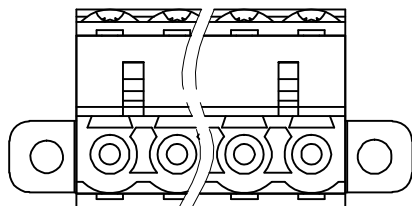

Specifications  
 Voltage rating:300VAC  
 Current rating:16 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding Voltage: 2500VAC(1min) Test time:60sec/1pcs  
 Wire range:12-26AWG  
 Torque:/  
 Operating temperature:-40°C to+105°C  
 Materials  
 Contact Material:Brass  
 Insulator Material: UL 94V-0 PA66  
 All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

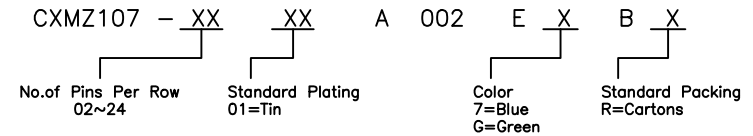

**Greenconn**  
 Website:www.greenconn.com  
 E-mail:sales@greenconn.com

| REV. | UNIT. | SCALE. |
|------|-------|--------|
| A    | mm    | 1:1    |

3RD.ANG PROJ.  
 PAGE. 1/1

| GENERAL TOLERANCE |          |
|-------------------|----------|
| X.±5.0'           | X.±0.50  |
| .X'±3.0'          | .X±0.30  |
| .XX'±2.0'         | .XX±0.20 |
| .XXX'±1.0'        | .XXX±/   |

|           |       |
|-----------|-------|
| DESIGNED: | DATE: |
| CHECKED:  | DATE: |
| APPROVED: | DATE: |

DWG. NO.  
CXMZ107-CA002EB  
 PART NO.  
CXMZ107-XXXXA002EXBX

TITLE.  
Pitch5.08mm-series