

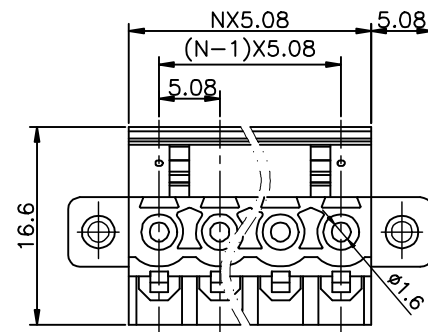
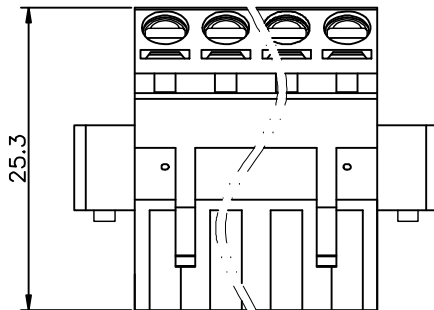


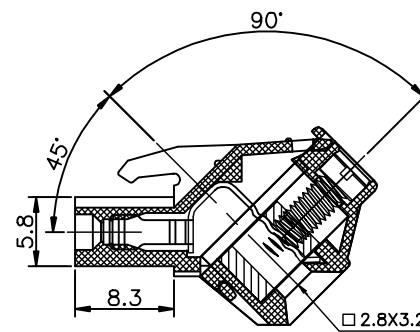

N=Number of confacts

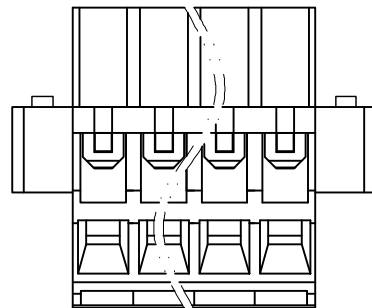

Specifications
 Voltage rating: 300VAC
 Current rating: 16Amps/way max.
 Contact resistance: 20mΩ(max)
 Insulation resistance: 5000MΩ/1000V
 Withstanding voltage: 2500VAC/1Min. Test time:60 Sec/1pcs
 Wire range: 12-26AWG
 Mechanical:
 Torque:5.0kgf.cm/M3
 Operating temperature:-40°C to+105°C
 Materials
 Contact Material:Brass
 Insulator Material: UL 94V-0 PA66
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

CXMZ119 - XX XX A 001 E X B X

No.of Pins Per Row 02~24 Standard Plating 01=Tin Color 1=Black 7=Blue G=Green Standard Packing R=Cartons



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	3RD.ANG PROJ.	PAGE.
A	mm	1:1		1/1

GENERAL TOLERANCE

X.'±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±/

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. CXMZ119-CA001EB
PART NO. CXMZ119-XXXXA001EXBX

TITLE. Pitch5.08mm-series
